

Execute Tests

- [Overview](#)
- [Navigation and Actions bar](#)
 - [Export Automated Test Definition](#)
 - [Export to Cucumber](#)
 - [Generic](#)
 - [Import Execution Results](#)
 - [Dataset](#)
- [Execution Status](#)
 - [Timer](#)
- [Affected Requirements](#)
- [Comment](#)
- [Execution Defects](#)
 - [Global and Test Step Defects](#)
- [Execution Evidence](#)
 - [Global and Test Step Evidence](#)
 - [Embedded Cucumber Evidence](#)
- [Issue Details](#)
 - [Test Description](#)
 - [Test Issue Links](#)
 - [Test Issue Attachments](#)
- [Pre-Conditions](#)
 - [Pre-Condition Attachments](#)
- [Custom Fields](#)
- [Test Details](#)
 - [Manual Test Step Results Table](#)
 - [Gherkin Test Details](#)
 - [Manual Execution](#)
 - [After importing automated results](#)
 - [Examples](#)
 - [Unstructured Test Details](#)
 - [Iterations](#)
 - [Filtering iterations](#)
 - [Status calculation](#)
- [Automated Results](#)
- [Activity](#)
- [Attaching Screenshots](#)
- [Updating the definition of the Test after the execution started](#)
 - [Reset Execution](#)
 - [Merge Execution](#)

Overview

You can either execute your tests manually or automatically. Even if it is an automated test, you can manually set the test status for that execution. You can also create custom statuses.

Tests are always executed within a Test Execution context, even if it's an ad hoc execution. You can execute tests inline (i.e., define the test run status), directly in the Test Execution issue screen, or you can use the Execution Screen which is detailed extensively below.

A Test Execution is validated if all the Tests that verify the specific environment target passed. In order to execute, monitor the progress, and report the results, each Test has its own Execution page details. Each Test associated with a Test Execution is called a **Test Run**. A Test Run is like an instance of the Test that contains a copy of the test definition (e.g., description, steps) and the result of that test in the context of that Test Execution.

When a Test definition is modified, the respective Test Runs aren't automatically updated. This happens because the execution of a Test depends directly on its definition. If the Test definition is changed, the executions might not be consistent with the definition anymore. Each time a Test Run is created, the Test definition is copied to it. This guarantees that when the Test definition changes, the Test Runs are not affected and will always contain the original (i.e., when it was added to the Test Execution) Test definition.

You are allowed to execute a Test if:

- you have permission to "**Browse**" the Test Execution issue
- you have permission to "**Resolve**" the Test Execution issue
- the Test Execution issue is not in a status configured to disallow executions
- the Test issue is not in a status configured to disallow executions



Please note

Find more about how you can disallow executions based on the workflow status of Test or Test Execution issues at:

- [Miscellaneous](#)
- [Using Jira workflows for testing purposes](#)

Even though you might not have permission to execute a Test Run and if the execution has already been started, you can see the execution details page in **read-only** mode. An informative message will be shown to at the top of the execution page if the current Test Run is in read-only mode.

When you execute a Test, the Xray Execution Screen is shown. This screen is accessible from the Test Execution issue view page and the Test issue view page (Test Runs section), and this is where the execution results are displayed and registered. This page contains information about the Test definition and the Test Execution issue context to allow you to execute the Test without exiting this page.

The execution screen is composed of the following sections:

- [Navigation and Actions bar](#)
- [Execution Status and Test Execution fields](#)
- [Affected Requirements](#)
- [Comments](#)
- [Defects](#)
- [Evidence](#)
- [Test issue details](#)
- [Custom Fields](#)
- [Preconditions](#)
- [Test details \(script or steps\)](#)
- [Result contexts](#)
- [Activity](#)

Dashboards

Projects

Issues

Boards

DbConsole

Tests

Create

Search

HELDER0 / Test Execution: HELDER0-6048 / Test: HELDER0-6047

Check user privileges

Dataset

Return to Test Execution

Execution Status

TODO

Started On: 12/May/21 6:18 PM

Finished On: -

Assignee: None

Executed By: -

Tests environments: -

Versions: -

Revision: -

Comment

Preview Comment

Click to add comment

Execution Defects (0)

No defects yet...

Execution Evidence (0)

No evidence yet...

Test Details

MANUAL

Custom Fields

run cf 1

run cf2

None

Test Description

Test Issue Links

1

tests

SEARCH2-1709 As an admin I can manage configuration of reports

OPEN

Iterations

476

Iteration 1 - admin configure reports and ...


Iteration 2 - project admin configure project repor...

Test Steps (3)			
1	<div>Step</div> <div>I choose the square root operation on the calculator</div>	<div>Data</div> <div></div>	<div>Expected Result</div> <div>The operation must appear selected</div>
	<div>Actual Result</div> <div>Comment</div> <div>Defects (0)</div> <div>Evidence (0)</div> <div>Step State</div> <div>PASS</div>		
2	<div>Step</div> <div>I enter an integer into the calculator</div>	<div>Data</div> <div>I = 9</div>	<div>Expected Result</div> <div></div>
	<div>Actual Result</div> <div>Comment</div> <div>Defects (0)</div> <div>Evidence (0)</div> <div>Step State</div> <div>PASS</div>		
3	<div>Step</div> <div>I press the <i>Calculate</i> button</div>	<div>Data</div> <div></div>	<div>Expected Result</div> <div>The result 3 must be displayed in the screen, at the right of the "=" sign</div>
	<div>Actual Result</div> <div>Comment</div> <div>Defects (0)</div> <div>Evidence (0)</div> <div>Step State</div> <div>PASS</div>		

Navigation and Actions bar

Always available, the navigation bar contains breadcrumbs to allow easy navigation between the Test issue hierarchy. It also contains a toolbar with the **Return to Test Execution** button that allows you to jump to the current Test Execution issue page, as well as the **Next** and **Previous** buttons, to quickly navigate to the execution screen of the other Tests included on the same Test Execution, if applicable.

On this bar, you can also find actions to **Export test definitions** and **Import execution results**. This is useful if you need to do an ad-hoc execution for an automated Test. Usually, automated tests are executed in a Continuous Integrating platform and the results are imported automatically into Xray (creating new Test Execution issues for the results) but you can also execute each automated Test individually and import the execution result.



Export Automated Test Definition

If you are executing an automated Test, you can export its definition right from the execution screen.


Export to Cucumber

If you're executing a Cucumber Test, an option to export the Test as a feature file will appear.



Generic

If you're executing a Generic Test, then an option to export the Test as text will appear.



Import Execution Results

If you already have the test results, just use this action to import the report files into Xray and update a specific Test Run.

Dataset

If you want to edit a test run dataset, you can do it by clicking on the **Dataset** button. To learn more about it click on [Parameterized Tests](#).

Execution Status

The **Execution Status** describes the current Test progress. The possible (native) status for a Test Run are **TODO**, **EXECUTING**, **FAIL**, **ABORTED**, and **PASS**. You can also create custom statuses in the Xray [Execute Tests](#) administration page.

You can change the status of the execution directly through this field. It supports inline editing and once activated, it will display a set of statuses that you can set the Test Run. If the option for setting the Test Run status manually without having to execute all Test Steps (or Examples, as in the case of Cucumber Tests) is enabled in the Xray administration page, then you can set the Test Run Status to any status, independent of the current aggregate status of the Test Steps (or Examples). If this option is disabled, then the status that you can set through this field will be limited to the available transitions based on the current Steps or Examples aggregated statuses.

The status section contains other relevant fields such as:

- **Timer** - The time elapsed since the last time the timer started and the total time logged into this execution
- **Assignee** - the User assigned to perform the current test execution
- **Executed By** - the last User that changed the status of the current test run
- **Versions** - the target release version tested by the current test execution
- **Revision** - the source code and documentation version used in the current test execution
- **Started On** - the date and time the execution of the current test started
- **Finished On** - the date and time the execution of the current test finished



You can change the Test Run assignee directly on the field. It supports inline editing and once activated, you can filter by the user and then select the one you wish to assign to the Test Run.

Assignee: Administrator

Executed By: Administrator

Tests environments: 11:44 AM - Tuesday - London

Activity

More

Assignee: administrator

Executed By: Showing 1 of 1 matching users

Tests environments: Administrator - admin...

If the dates are configured to be edited, you can edit the Started On date by clicking in the calendar icon and choosing the date and time. You can check your configurations by going to Jira Administration > Add-ons > Global Preferences.

Execution Status PASS

Started On: 15/Nov/17 09:24 PM

Finished On: 16/Nov/17 9:24 AM

Affected Requirements

WEB-818 As a user i can login with my Faceb

Comment

Click to add comment

Calendar

November, 2017

Today

Mon Tue Wed Thu Fri Sat Sun

1 2 3 4 5

6 7 8 9 10 11 12

13 14 15 16 17 18 19

20 21 22 23 24 25 26

27 28 29 30

Time: 09 : 24 pm

Select date

Note: The Jira `jira.date.time.picker.java.format` and `jira.date.time.picker.javascript.format` properties in Jira Administration advanced settings should belong to the same pair of properties in order for the datetime picker work properly. See the following link for more information

- <https://confluence.atlassian.com/jira/changing-the-due-date-input-format-192536.html>


Timer

Timer

00:00:16


2h 50m logged

The timer is used to help the user track the time spent in the execution of the test. This component will only be visible if the corresponding setting is active in the [miscellaneous](#). The timer itself can be started, paused and reset manually using the button to do so:

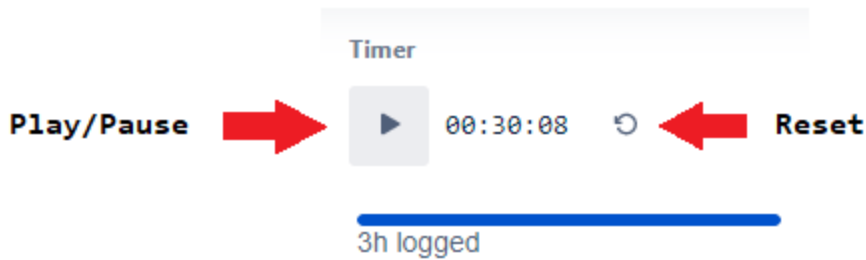

You can also edit the value on the timer by clicking on it if the **Set the value of the Time Tracker** setting is active in the project settings.

The timer will also automatically start when the status of the Test Run changes to **Executing** and it will pause when it changes to a final status (i.e. **Passed**, **Failed**), it will also reset when it the Test Run changes to **Todo**. Below the timer there is a component that tracks the time logged for this execution:



By clicking on it, you can log more time into it:

by clicking on it, you can log more time into it.

Time Spent*

12h 0m

(eg. 3w 4d 12h) ⓘ

An estimate of how much time you have spent working.

Date Started*

25/Sep/23 4:38 PM

📅

Remaining Estimate

☒ Adjust automatically

the estimate will be reduced by the amount of work done, but never below 0.

☐ Use existing estimate of 0 minutes

☐ Set to

(eg. 3w 4d 12h)

☐ Reduce by

(eg. 3w 4d 12h)

Work Description

Style ▾ B I U A 🔗 🌐 ☰ ☷ ⌕ + - ↕

Test Key: XRAY-3564

Visual

Text

↶ ↷

Find more time-tracking apps...

Log

Cancel

Time added in this dialog will be added to the work log of the respective Test Execution:

Activity

All

Comments

Work Log

History

Activity

Newest first

Bruno Conde

logged work - 25/Sep/23 4:38 PM

Time Spent:

1 day, 4 hours


Test Key: XRAY-3564

Affected Requirements

This section provides the ability to manually set the status for Requirement issues that are tested by the current Test issue. By default, the requirement status is calculated based on the latest Test Run of each Test associated with a given requirement. Even though the Test Run status is **FAILED**, not all requirement issues associated with the Test issue might have failed. Some of these requirements can, for instance, be **PASSED**, if the tester chooses to explicitly set the requirement status. This functionality makes it possible for a single Test issue to test multiple requirement issues with different concerns and functionalities. These requirement statuses that are explicitly set in a Test Run will then be considered when calculating the Requirement Status and Requirement Coverage.



This section is only visible if the "**Separation of Concerns**" option is disabled in [Coverage Settings](#) settings page.

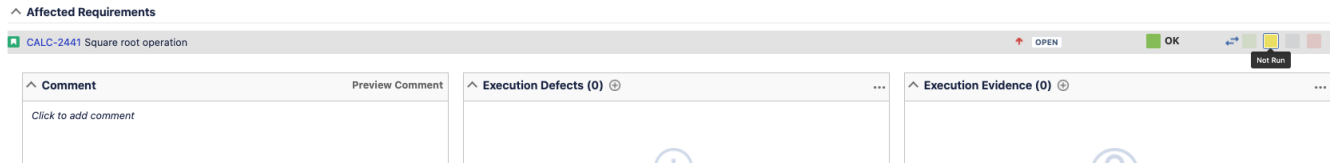


All affected requirement statuses will be updated whenever a step (or example in the case of Cucumber automated Tests) status is changed. The status for any affected requirement can always be changed by clicking on the status and choosing the desired option.

Comment


The Comment field is inline editable to input overall appreciations about the current execution without reloading the page

The field supports the [Jira markup wiki language](#).

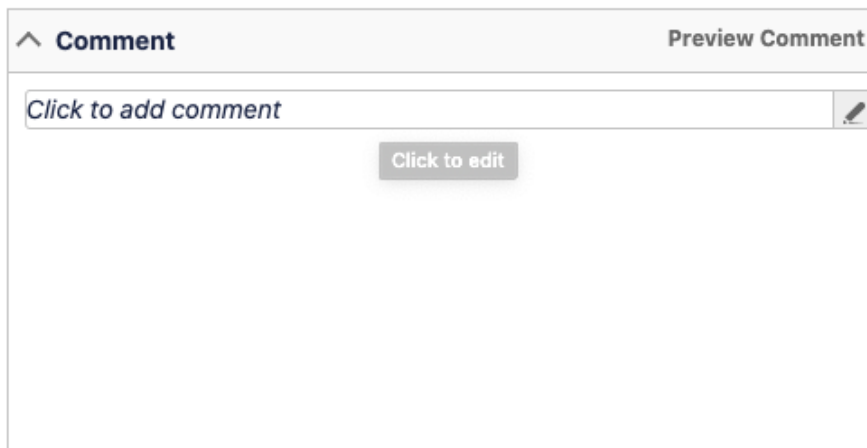

Execution Defects


The Execution Defects field lists the defects related to the current execution. It is possible to create a new Defect issue, create a new Sub-task or Add existing Defects by clicking on the respective option.

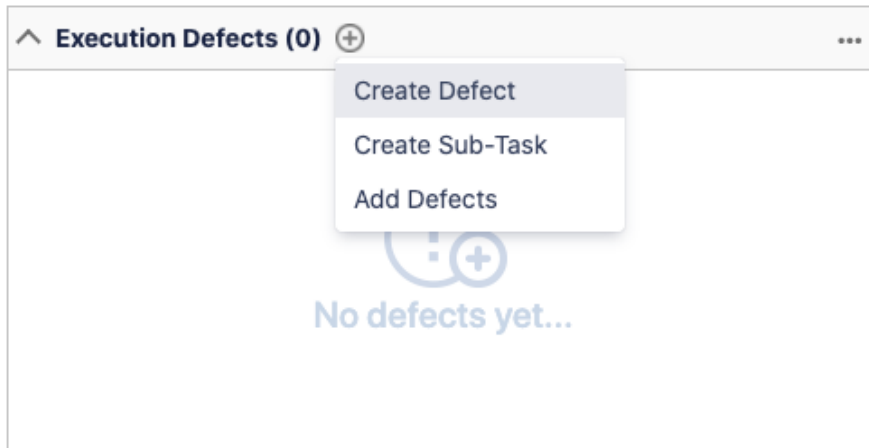

Global and Test Step Defects

The options menu on the right top corner appears for **Manual Tests only**, it changes the presentation of the defects list.

By enabling the *Show Step Defects* option, besides the Global Defects, the Test Step Defects will be shown in this list along with the index of the Step it belongs to.

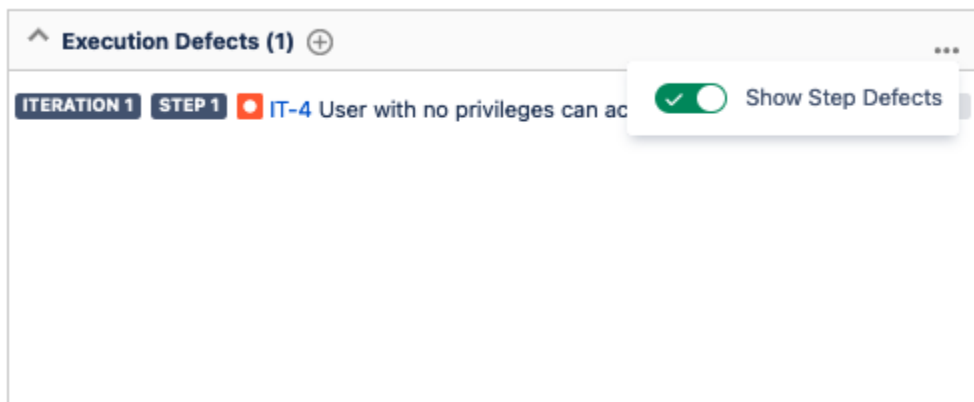

Execution Evidence

The Execution Evidences field lists the attachments related to the current execution and by clicking on the **Add Evidence Icon**, opens the **Attach Files** dialog box.



Global and Test Step Evidence

The options menu on the right top corner appears for **Manual Tests only**, it changes the presentation of the evidence list.

By enabling the *Show Step Evidence* option, besides the Global Evidence, the Test Step Evidence will be shown in this list along with the index of the Step it belongs to.

Embedded Cucumber Evidence

When importing Cucumber JSON results, the evidence imported appear in the Global Execution Evidence field.

The Cucumber Embedded files are displayed on the Global Evidence if the *Show Embedded Evidence* option is enabled.

^
Execution Evidence (75)
+

☒
Show Embedded Evidence

RESULT 1	evidence_step_1_0.png	0.4 kB
RESULT 1	evidence_step_1_1.jpg	1 kB
RESULT 1	evidence_step_1_2.txt	0.0 kB
RESULT 1	evidence_step_1_3.html	0.2 kB
RESULT 1	evidence_step_1_4.xml	0.1 kB
RESULT 1	evidence_step_1_5.png	0.4 kB

● ● ● ● ● ● ● ● ● ● ● ● ● ●

Issue Details

This section includes some fields present on the Test issue. It often contains useful information for testers to execute the Test.

Test Description

This section includes the current Test issue description. The Test issue description often contains useful information for testers to execute the Test.

The field supports the [Jira markup wiki language](#).

Test Details
MANUAL

^ Custom Fields

run cf 1
☒

run cf2
None

> Test Description

^ Test Issue Links 2

created	IT-4 User with no privileges can access other user's profiles	=	OPEN
tests	SEARCH2-1709 As an admin I can manage configuration of reports		OPEN

Test Issue Links

This section shows all links associated with the Test.


Test Issue Links (2)
^

created	CALC-52 Error calculating the square root of integers		OPEN
tests	CALC-33 Square root operation		OPEN

Test Issue Attachments

This section shows all attachments associated with the Test.

Test Issue Attachments (1)

 ForTest.json

47 kB Today 5:26 PM

Pre-Conditions

The Pre-Condition field shows the Pre-Conditions issues associated with the current Test.

Pre-Conditions (1)

▼ CALC-297 0 (4)

Turn on Calculator

1 Given that i'm in the Test Environment

2 Then turn on the Calculator

Pre-Condition Attachments


The Pre-Condition field also shows the Pre-Conditions attachment in a inline dialog.


▼ CALC-297 0 (4)


Turn on Calculator


1 Give

2 Then

 IC.png

 IC_Clear.png

 IC_Passed.png

 LINKS_IC.png

Custom Fields

You define additional custom fields for Test Runs. These fields can be useful to add extra information to Test Runs, usually only available when or after executing Tests.

Test Run custom fields can be configured by project and by Test Type. Therefore, these settings will not affect other projects within your Jira instance. For instance, it is possible to have custom fields just for Manual Tests within a project.

If there are any custom fields defined for the scope of the Test Run, they will appear on the "Custom Fields" section.

Custom Fields

Avg CPU usage

Requests per second

Error rate

Negligent 0% - 20%

45

0.02

It is also possible to define custom fields that are **mandatory**. If this is the case, users will not be able to set a final status on the Test Run if there is any required custom field that is not populated.

Book Store / Test Execution: STORE-432 / Test: STORE-430

Load testing subscription

Execution Status

TODO

↔

■

■

■

■

Started On:

📅

Finished On:

Final status transitions are disabled, Test Run is missing required fields.

Test Details

Within the Test Details section, you will find the Test script to execute. Depending on the Test Type, this section can display Test Steps, a Generic Definition field (for unstructured Tests), and Gherkin scenarios.

Manual Test Step Results Table

A **Manual Test** execution screen contains the **Test Steps** field, listing the Steps, Data, Expected Result and Attachments to be used as reference while testing.

By clicking on each step, the following fields become editable:

- the **Actual Result** field which contains the actual result of the execution of the step;
 - This field can be edited using the wiki markup toolbar from Jira
 - It's possible to refer to an Evidence previously added to any Step or Global execution
 - It's possible browse the local files through the browse option

- the **Comment** field which contains any notes about the corresponding step;
- the **Defects** field which contains any defect associated with the corresponding step. It is also possible to input new defects by:
 - Clicking on the Create Defect to create a new Defect
 - Clicking on the Create Sub-Task to create a new Sub-Task
 - Clicking on the Add Defects to add an already existing defect

- [illegible]

- Note: Changing the Status on the each Step will affect the **Execution Status** field on the Execution Screen.

Gherkin Test Details

Manual Execution

After importing automated results

Test Details

Test Type:Automated[Cucumber]

Scenario Type:Scenario Outline

Scenario:

1

Given I have entered <input_1> into the calculator

2

And I have entered <input_2> into the calculator

3

When I press <button>

4

Then the result should be <output> on the screen

5

6

Examples:

7

input_1	input_2	button	output
30	20	sub	10
5	2	sub	3
40	0	sub	0

8

9

10

Examples

A scenario **outline** of an automated Cucumber test will normally contain an "examples" table containing several inputs and outputs for the given scenario.

The examples section details these examples, containing an overall status bar in the header and a table with all the examples below. Each example can have the status: PASS, FAIL or TODO.

A scenario outline test is **PASS** only if all examples passed.

A scenario outline test is **FAIL** if at least one of the examples failed.

A scenario outline test is **TODO** if at least one of the examples did not run and all the other examples passed or todo.

Examples

<input_1>	<input_2>	<button>	<output>	Status
30	20	sub	10	PASS
5	2	sub	3	FAIL
40	0	sub	0	TODO

Unstructured Test Details

Unstructured Tests only contain the generic **definition field** on the Test Details section. This field can specify a test script, an ID to an external (automated) test case, or an Exploratory Test charter. Similar to Gherkin Tests, most unstructured test results will be imported or set by another tool. However, it is also possible to set the status of unstructured tests manually.

Test Details	
Test Type:	Generic
Definition:	jmeter.bookstore.newsletter.subscription

Iterations

When this is a test run of a data-driven test, this field shows all the iterations corresponding to the rows of the dataset closest to the test run. For each iteration, the preconditions and steps appear with the expected parameter values for it. To learn more about it click on [Parameterized Tests](#).

All operations for test steps are also available within an iteration, namely adding defects, evidence, and the actual result.

This section also features a progress bar displaying the status of all iterations.

Filtering iterations

It is also possible to filter the iterations by status. A filter button is provided next to the iterations progress bar. Clicking on this button will open a panel with all the available statuses. Choose one or more statuses and press Apply.

Status calculation

When a step status is changed, the iteration status will be updated automatically, according to the step statuses and, in turn, the overall test status will also be updated based on all iterations statuses.

Test DetailsMANUAL

Iterations10

Iteration 1

In Search of Lost Time

\$34

5

Marcel Proust

Yes

New

Paperback

Yes

1

PASSED

Iteration 2

One Hundred Years of Solitude

\$20

4.9

Gabriel Garcia Marquez

Yes

Used

Paperback

Yes

1

PASSED

Iteration 3

The Great Gatsby

\$39

4.7

F. Scott Fitzgerald

No

New

Kindle

Yes

1

PASSED

Iteration 4

In Search of Lost Time

\$34

5

Marcel Proust

Yes

New

Paperback

No

1

PASSED

Iteration 5

One Hundred Years of Solitude

\$20

4.9

Gabriel Garcia Marquez

Yes

Used

Paperback

No

1

PASSED

Iteration 6

The Great Gatsby

\$39

4.7

F. Scott Fitzgerald

No

New

Kindle

No

1

PASSED

Iteration 7

In Search of Lost Time

\$34

5

Marcel Proust

Yes

New

Paperback

Yes

2

EXECUTING

Steps12

1

Action

Add 2 books of In Search of Lost Time into the basket.

Data

None

Expected Result

After items are added, a confirmation message appears mentioning 2 Items of In Search of Lost Time were added to the basket.

Actual Result

Comment

Defects

Evidence

Step State

PASSED

2

Action

Click on the basket icon located on the top right toolbar of the app.

Data

None

Expected Result

The basket page is displayed containing all 5 items.

Actual Result

Comment

Defects

Evidence

Step State

PASSED

3

Action

Attachments 1

Press the Checkout button to start the checkout process.

Data

None

Expected Result

The checkout process is initiated asking the user the address details.

Actual Result

Comment

Defects

Evidence

Step State

PASSED

Automated Results

Xray for Jira supports the import of multiple execution results for the same Test Run. Multiple executions for the same Test Run specifies different results for different contexts/environments. Multiple executions are only supported for Automated Tests. Manual Tests do not have this concept.

When a Test Run contains multiple executions imported from external sources like [Calabash](#) and [Xamarin Test Cloud](#), these executions are presented in a "Results" section on the execution page.

This section contains a Table with all executions for the same Test Run. The table has the following columns:

- **Context:** An execution context name (in the case of Xamarin Test Cloud results, the mobile device, and operating system version)
- **Error Message:** A possible error message if the result has failed.
- **Duration:** The complete duration of an execution result.
- **Status:** The execution results status.

Results

Context	Error Message	Duration	Status	
▼ HTC One (4.3)		16 millisecc	PASS	
<input_1>	<input_2>	<button>	<output>	Status
20	30	add	50	PASS
2	5	add	7	PASS
0	40	add	40	PASS
► Samsung Galaxy S III Mini (NFC) (4.1.2)		16 millisecc	PASS	

Activity

The Activity field lists all the activities related to the current execution.

Activity



admin changed the comment of this execution.

New Value

While the Test Execution was being performed, a recurring Bug was detected, represented on the Evidence 3.jpg.

Today 10:31 PM



admin added attachments to this execution:

• Evidence 3.jpg

Today 10:24 PM




admin associated defect "DEMO-36-Bug 5 - Trivial" with this execution.


Today 10:23 PM

Attaching Screenshots

To attach a screenshot, paste the image from your clipboard using the relevant keyboard shortcut. (For Mac OSX, use **CMD+V**; for Windows, use **Ctrl+V**.)

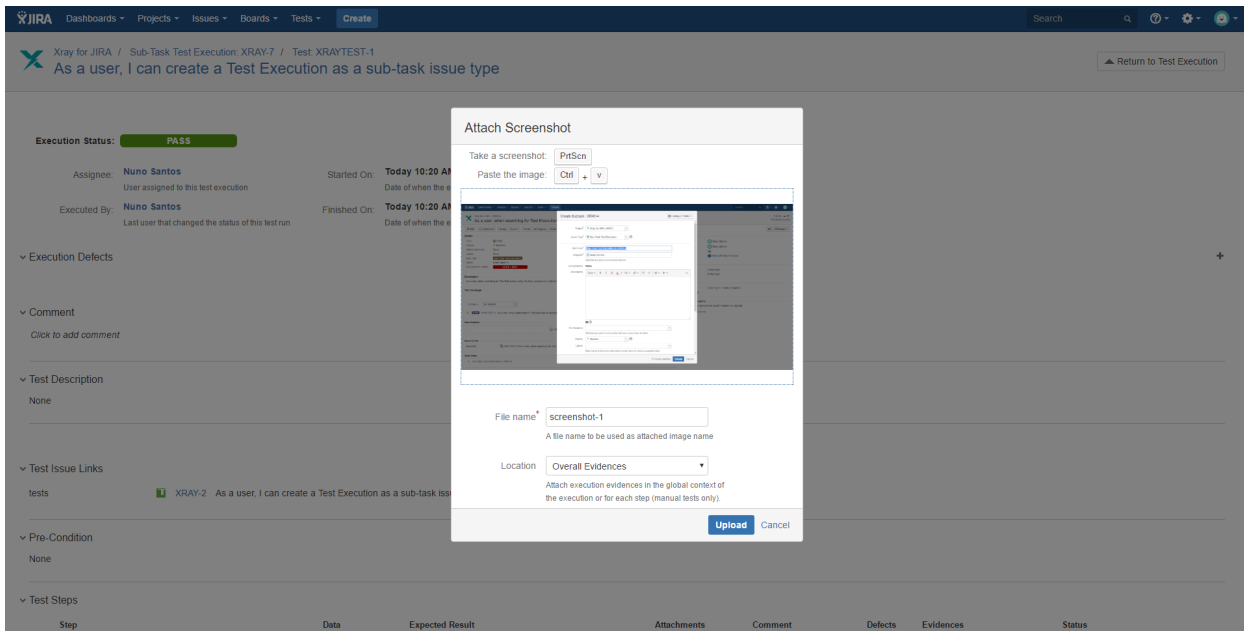

Enter a file name for the screenshot you are attaching (defaults to "screenshot-" concatenated with the next number available) and choose where you want to place the evidence (Overall Execution or Test Steps).

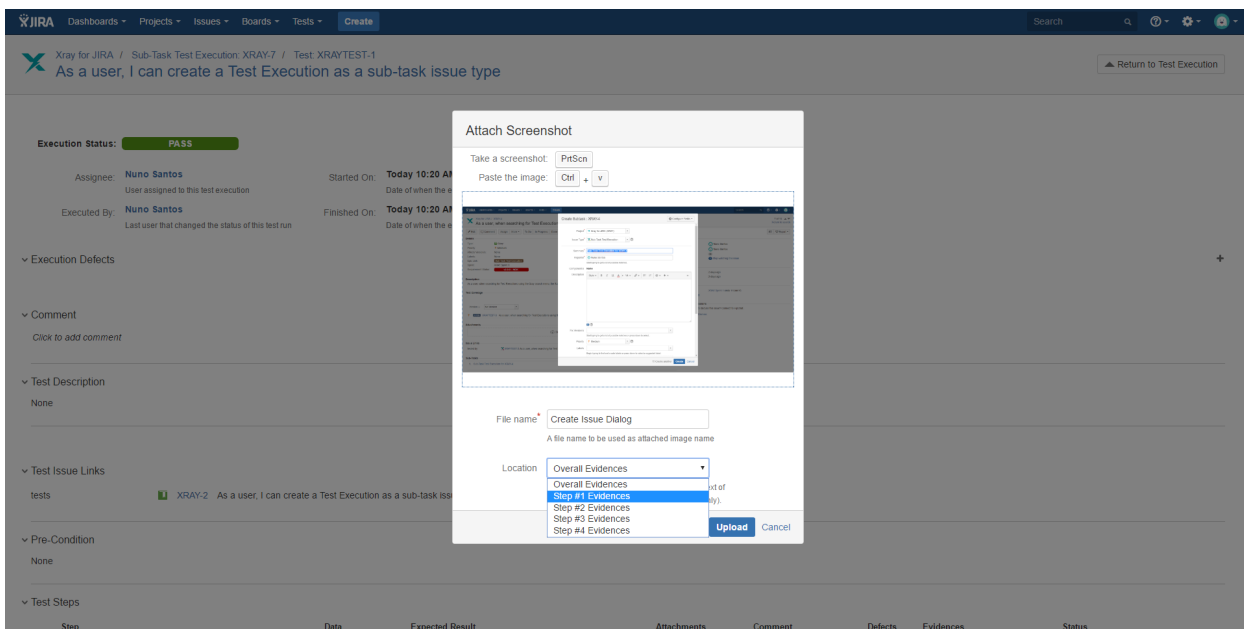

Click **Upload** to attach the captured image to your Test Run.

Updating the definition of the Test after the execution started

When a Test definition has changed, a new dialog box will appear on the top of the Execution page informing you that the current execution is obsolete, and will prompt you with Reset or Merge buttons that, when pressed, will load the updated definition as well as delete all the execution data or merge the new Test definition into the current state of execution.

i

Test definition has been modified. You can reset the execution of this test by pressing the "Reset" button. This will load the new test definition and delete the current execution data. If you wish to update the Test definition and maintain the current execution, you can click on the "Merge" button.

Reset

Merge

Reset Execution

You can choose to reset the Execution or keep it for historic record. If you reset the execution, all information previously saved (status, evidence, defects) will be erased.

Merge Execution

You can choose to merge the new Test definition into the current status of execution. This will keep steps that weren't changed along with the associated results/comments/evidence. It will also load new steps (moved, erased, or created), pre-conditions, or attachments definitions. This will always force a recalculation of Test Run Status. For instance, if the current Test Run Status is FAIL because of a step and this step is removed from Test, if you merge, then the Test Run Status will change to whatever the value combination of the others steps returns.