


[Xray Server] No permissions to execute Test Executions

This article will help when a user doesn't have permission to execute a Test.

[Problem] [Cause 1] [Solution] [Cause 2] [Solution] [Cause 3] [Solution] [Related articles]

Problem

Check in the image above the associated error:

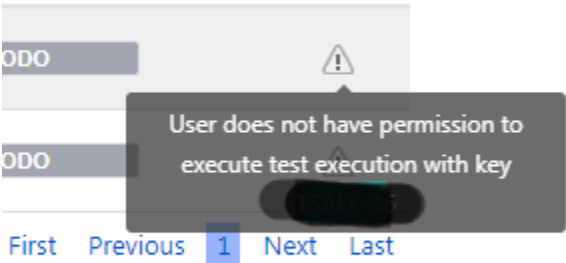

Cause 1

The User does not have the necessary issue permissions: "**Browse**" and "**Resolve**"

Solution

Go to Project Settings Permissions Project Permissions:

Project Permissions

Permission helperActions

Permissions define who can access a project, and what they can do within the project, and with the issues within that project.

The permission scheme defines how the permissions are set up for this project. To change the permissions, you can select a different permission scheme, or modify the current scheme.

[Learn more about project permissions](#)

Scheme used by this project: Default Permission Scheme

USED BY 9 PROJECTS

Project permissions	
Permission	Granted to
<div><div>Administer Projects</div><div>Ability to administer a project in Jira.</div><div><div>Extended project administration</div><div>ENABLED</div></div><div>Grant extended project administration permissions.</div></div>	<div><div>Project role</div><div><ul style="list-style-type: none">Administrators</div></div>
<div><div>Browse Projects</div><div>Ability to browse projects and the issues within them.</div></div>	<div><div>Application access</div><div><ul style="list-style-type: none">Any logged in user</div></div>

Versions
Components
Users and roles
Permissions
Issue Security
Notifications
HipChat integration
Xporter
Templates
Scheduled Reports
Permission Schemes
Development tools
Issue collectors

Issue permissions	
Permission	Granted to
Assignable User Users with this permission may be assigned to issues.	Application access <ul style="list-style-type: none"> Any logged in user
Assign Issues Ability to assign issues to other people.	Application access <ul style="list-style-type: none"> Any logged in user
[Xray] Override Assign Test Runs Allows users to set the Test Run assignee without the Edit Issues and Assign Issues permissions.	
Close Issues Ability to close issues. Often useful where your developers resolve issues, and a QA department closes them.	Application access <ul style="list-style-type: none"> Any logged in user
Create Issues Ability to create issues.	Application access <ul style="list-style-type: none"> Any logged in user
Delete Issues Ability to delete issues.	Project role <ul style="list-style-type: none"> Administrators
Edit Issues Ability to edit issues.	Application access <ul style="list-style-type: none"> Any logged in user
Link Issues Ability to link issues together and create linked issues. Only useful if issue linking is turned on.	Application access <ul style="list-style-type: none"> Any logged in user
Modify Reporter Ability to modify the reporter when creating or editing an issue.	Project role <ul style="list-style-type: none"> Administrators
Move Issues Ability to move issues between projects or between workflows of the same project (if applicable). Note the user can only move issues to a project he or she has the create permission for.	Application access <ul style="list-style-type: none"> Any logged in user
Resolve Issues Ability to resolve and reopen issues. This includes the ability to set a fix version.	Application access <ul style="list-style-type: none"> Any logged in user

Cause 2

The Test Execution issue is not in a Status configured to disallow executions.

Solution

Go to Administration Manage Apps Xray Settings Miscellaneous, under the "Workflow Status" section, to the option "Disallow executions of Tests with workflow statuses," and check if you have any status that does not allow users to execute the Test:

Workflow Status

Disallow executions of Tests with workflow statuses Choose the workflow statuses in which the Tests are not allowed to be executed.

Disallow executions with workflow statuses

In progress Test

Cause 3

The Test Executions are restricted to the assignee user.

Solution

Go to Administration Manage Apps Xray Settings Miscellaneous, on the "Test Run Options" section; the third one may be activated "Restrict tests execution to assignee," disable this option to allow all given users to be the Test Run assignee:

Miscellaneous

The Global Configurations for Xray.

- ☐ Display Pre-Conditions section before Test Details

When this option is enabled, the Pre-Conditions web panel on the Test issue view screen will be displayed.

- ☒ Display Manual Test Steps table in short view

When this option is enabled, the cells of the Manual Tests Steps table will be displayed in short view mode content.

- ☒ Delete test definition when changing Test type

When this option is enabled, the test definition will be deleted when changing Test Type. If this option is disabled, the test definition will be preserved.

Test Run Options

- ☒ Set final Test Run status

When this option is enabled, the overall Test Run status can be set directly, without depending on the status of the Test Run.

- ☒ Inline Execute Tests

When this option is enabled, Test Runs can be executed inline, directly from the Test Execution and Test is in progress.

- ☒ Restrict tests execution to assignee

When this option is enabled, tests execution is restricted to the assignee user.

Related articles

Check [here](#) for more information.

- [\[Xray Cloud\] Understanding Xray Cloud version nomenclature](#)
- [\[Xray Cloud\] No permissions to execute Test Executions](#)
- [\[Xray Data Center\] How to get Xray Attachments size info on Jira Data Center?](#)
- [\[Xray Cloud\] How to check Tests/Test Runs with attachments?](#)
- [\[Xray\] Templates for migrating Tests from Cloud to Server/Server to Cloud](#)