

Integration with TeamCity



- [Overview](#)
- [Release Notes](#)
- [Installation](#)
 - [Manual Installation](#)
 - [Configuration](#)
 - [Jira servers](#)
 - [Jira Cloud](#)
- [Build Steps](#)
 - [Xray: Cucumber Features Export Task](#)
 - [Configuration](#)
 - [Xray: Cucumber Features Import Task](#)
 - [Xray: Results Import Task](#)
 - [Configuration](#)
 - [Additional fields](#)
- [Examples](#)
 - [Cucumber](#)
 - [Exporting Cucumber features](#)
 - [Importing Cucumber features](#)
 - [Importing the execution results](#)
 - [Importing the execution results with user-defined field values](#)
 - [JUnit](#)
 - [Importing the execution results](#)
- [Troubleshooting](#)
 - [The build process is failing with status code 403](#)
 - [Invalid JIRA instance](#)

Overview

Xray enables easy integration with TeamCity through the "Xray TeamCity Plugin", providing the means for successful Continuous Integration by allowing users to report automated testing results.



Please note

Keep in mind that some endpoints may not be available for Xray Cloud, just for Xray for Jira server.

Release Notes

- [Xray TeamCity Plugin 1.0.0 Release Notes](#)

Installation

The installation is made manually. For more information on how to install add-ons, please refer to [how to install add-ons](#).



Requirements

The TeamCity baseline for this add-on is 2018.1 and it may not work properly with previous versions.

Manual Installation

1. Upload the plugin



Download the latest version of the TeamCity Plugin

You may download the latest version of the TeamCity plugin from the latest [Release Notes](#).

2. Restart TeamCity (if needed as shown in the screenshot below)

Plugins List

This TeamCity installation has **92** plugins (including 1 external)

[Available plugins](#)

[+ Upload plugin zip](#)

⚠ Plugins list was modified. To apply the changes, please restart the TeamCity Server.
Modified plugins: [Xray TeamCity Plugin](#)

External plugins

Plugin Name	Version	Vendor	Home Path	
⚠ Xray TeamCity Plugin Interacts with Xray for easing CI/CD allowing the submission of automated test results.	1.0.0	Xpand IT	<TeamCity Data Directory>/plugins/xray-teamcity-integration.zip	

Configuration

Xray for TeamCity is configured in the global settings configuration page **Administration > Integrations > Xray**.

Jira servers

The Jira servers configuration defines connections with Jira instances.

To add a new Jira instance connection, you need to specify some properties:

1. **Configuration alias:** a friendly name for the configuration
2. **Server or Cloud:** Server
3. **Server Address:** The address of the Jira Server where Xray is running
4. Authentication:
 - a. **User:** username
 - b. **Password.**



Please note

The user present in this configuration must exist in the JIRA instance and have permission to Create Test and Test Execution Issues

Jira Cloud

The Jira Cloud configuration defines connections with Jira Cloud.

To add a new Jira Cloud connection, you need to specify some properties:

1. **Configuration alias:** a friendly name for the configuration
2. **Server or Cloud:** Cloud

3. Authentication:
 - a. **Client ID**: obtained from Xray Cloud (more info [here](#))
 - b. **Client Secret**: obtained from Xray Cloud (more info [here](#))

Xray

Configure your Jira instances. Find out more in our documentation. [?](#)

+ Add Instance

Jira Instance

Configuration alias: *

Xray Instance

Your Jira instance name alias.

Server or Cloud: *

Server

Server Address: *

http://localhost:8080

Your Jira instance server address. Example: http://<your server>:<port>

Username: *

admin

Password: *

Test Connection

Delete Instance

Jira Instance

Configuration alias: *

Xray Cloud Instance

Your Jira instance name alias.

Server or Cloud: *

Cloud

Client ID: *

00181D0816604F24B3ACF865ECECDC0D

Client Secret: *

Test Connection

Delete Instance

Save

Build Steps

Build steps are the building blocks of the build process. These need to be defined in the build configuration.

The app provides:

- one build step for exporting Cucumber Scenario/Scenario Outlines from Jira as .feature files
- one build step for importing Cucumber Tests from existing Cucumber features into Jira.
- one build step which publishes the execution results back to Jira.

Xray: Cucumber Features Export Task

This build step will export the Cucumber Tests (i.e., Scenario/Scenario Outlines) in .feature or bundled in a .zip file. The rules for exporting are defined [here](#).

It invokes Xray's Export Cucumber Tests REST API endpoint (see more information: [server](#) or [cloud](#)).

Configuration

Some fields need to be configured in order to export the Cucumber Tests. As input, you can either specify issue keys (see the endpoint documentation for the [server](#) or [cloud](#)) or the ID of the saved filter in Jira.

field	description
Jira instance	The Jira instance where Xray is running
Issue keys	Set of issue keys separated by ";
Filter ID	A number that indicates the filter ID
File path	The relative path of the directory where the features should be exported to; normally, this corresponds to the "features" folder of the Cucumber project that has the implementation steps. Note: The directory will be created if it does not exist.

Xray: Cucumber Features Import Task

This build step is only available for the server and will import existing cucumber Tests from existing Cucumber feature files into Xray issues. This Task will import from .feature files and also from .zip files.

It invokes Xray's Import Cucumber Tests REST API endpoint (see more information [here](#))

field	decription
JIRA instance	The Jira instance where Xray is running.
Project Key	This is the project where the Tests and Pre-Conditions will be created/updated.
Cucumber feature files directory	This is the directory containing your feature files. All the files in this directory and sub directories will be imported.
Modified in the last hours	By entering an integer <i>n</i> here, only files that where modified in the last <i>n</i> hours will be imported. Leave empty if you do not want to use this parameter.

Xray: Results Import Task

The app provides easy access to Xray's Import Execution Results REST API endpoints (see more information for the [server](#) or [cloud](#)). Therefore, it mimics the endpoints input parameters.

It supports importing results in Xray's own JSON format, Cucumber, Behave, JUnit, and NUnit, among others. However, there are some endpoints in the server that may not yet be available for Xray Cloud.

These are the available endpoints.

	Server	Cloud
Xray JSON	✓	✓
Cucumber JSON	✓	✓
Cucumber JSON multipart	✓	✗
Behave JSON	✓	✗
Behave JSON multipart	✓	✗
JUnit XML	✓	✓
JUnit XML multipart	✓	✗
NUnit XML	✓	✓
NUnit XML multipart	✓	✗
Robot XML	✓	✗
Robot XML multipart	✓	✗
Compressed .zip file	✓	✗
TestNG XML	✓	✓
TestNG XML multipart	✓	✗

Using a glob expression, you can import multiple results files in the following formats:

- JUnit
- TestNG
- NUnit
- Robot framework

For those formats, the file path needs to be relative to the workspace.

Configuration

field	description
Jira instance	The Jira instance where Xray is running
Format	A list of test result formats and its specific endpoint
Execution Report File	The results relative file path "Glob" expressions are supported for: - JUnit - TestNG - NUnit - Robot framework

Additional fields

Depending on the chose test result format and endpoint, some additional fields may need to be configured.

format and specific endpoint	field	description
Behave JSON multipart Cucumber JSON multipart NUnit XML multipart JUnit XML multipart Robot XML multipart TestNG XML multipart	Test execution fields	An object (JSON) specifying the fields for the issue. You may specify the object either directly in the field or in the file path.  Learn more The custom field IDs can be obtained using the Jira REST API Browser tool included in Jira. Each ID is of the form "customfield_ID". Another option, which does not require Jira administration rights, is to invoke the "Get edit issue meta" in an existing issue (e.g., in a Test issue) as mentioned here. Example: GET http://yourserver/rest/api/2/issue/CALC-1/editmeta
NUnit XML JUnit XML Robot XML TestNG XML	Import to Same Test Execution	When this option is check, if you are importing multiple execution report files using a glob expression, the results will be imported to the same Test Execution
	Project key	Key of the project where the Test Execution (if the Test Execution Key field wasn't provided) and the Tests (if they aren't created yet) are going to be created
	Test execution key	Key of the Test Execution
	Test plan key	Key of the Test Plan
	Test environments	List of Test Environments separated by ";
	Revision	Source code's revision being target by the Test Execution
	Fix version	The Fix Version associated with the test execution (it supports only one value)

Examples

Cucumber

In a typical [Cucumber Workflow](#), after having created a Cucumber project and the Cucumber tests specified in Jira, you may want to have a project that **exports** the features from Jira, executes the automated tests on a CI environment and then **imports** back its results.


For this scenario, the Jenkins project would be configured with a set of tasks responsible for:

1. Pulling the Cucumber project
2. **Exporting Cucumber features from Jira to your Cucumber project**

3. Executing the tests in the CI environment
4. **Importing the execution results back to Jira**

Exporting Cucumber features

To start the configuration, add the build step *Xray: Cucumber Features Export Task*.

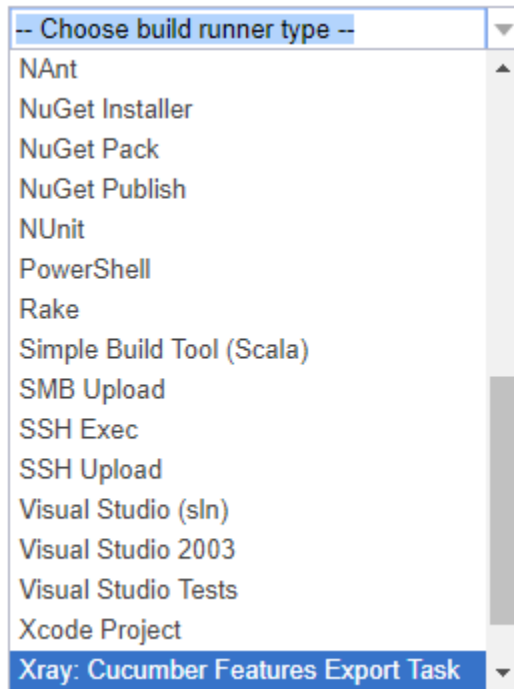


A screenshot of a dropdown menu titled "-- Choose build runner type --". The menu lists various build tools and tasks, including NAnt, NuGet Installer, NuGet Pack, NuGet Publish, NUnit, PowerShell, Rake, Simple Build Tool (Scala), SMB Upload, SSH Exec, SSH Upload, Visual Studio (sln), Visual Studio 2003, Visual Studio Tests, Xcode Project, and Xray: Cucumber Features Export Task. The last option, "Xray: Cucumber Features Export Task", is highlighted in blue.

After that, configure it.

In this example, we configured the task to extract the *features* from a set of issues (PROJ-78 and PROJ-79) to the folder that holds the Cucumber project.

New Build Step

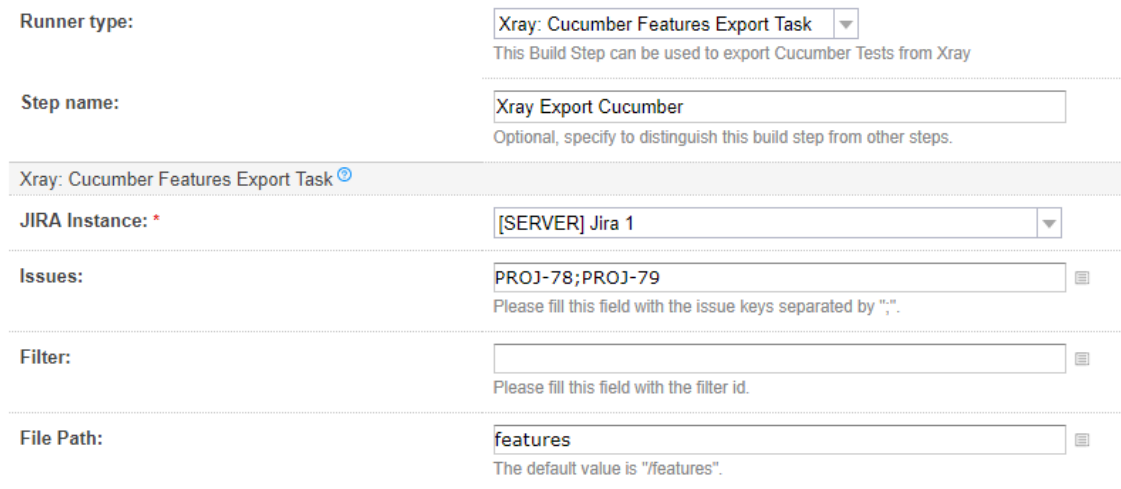

A screenshot of the "New Build Step" configuration form. The form has several fields:

- Runner type:** A dropdown menu showing "Xray: Cucumber Features Export Task". Below it, a note says "This Build Step can be used to export Cucumber Tests from Xray".
- Step name:** A text input field containing "Xray Export Cucumber". Below it, a note says "Optional, specify to distinguish this build step from other steps."
- Xray: Cucumber Features Export Task** (with a help icon).
- JIRA Instance: *** A dropdown menu showing "[SERVER] Jira 1".
- Issues:** A text input field containing "PROJ-78;PROJ-79". Below it, a note says "Please fill this field with the issue keys separated by ','."
- Filter:** A text input field. Below it, a note says "Please fill this field with the filter id."
- File Path:** A text input field containing "features". Below it, a note says "The default value is '/features'."

Please read our documentation for more information. [?](#)


[Show advanced options](#)



Two buttons: "Save" (blue) and "Cancel" (grey).

Importing Cucumber features

To start the configuration, add the build step *Xray: Cucumber Features Import Task*.

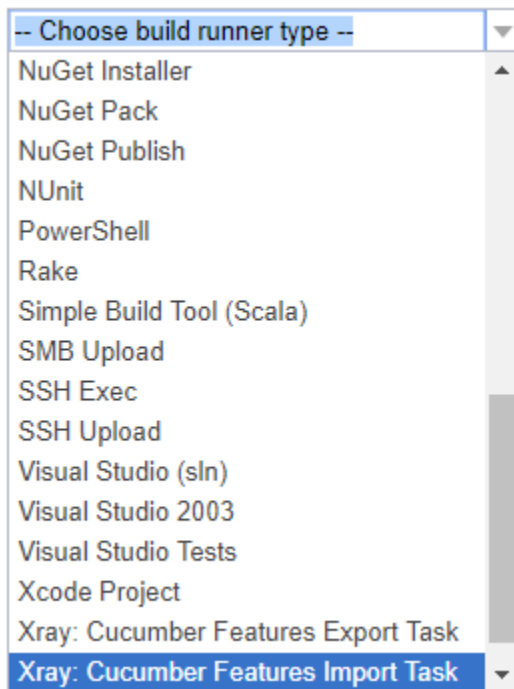


-- Choose build runner type --

- NuGet Installer
- NuGet Pack
- NuGet Publish
- NUnit
- PowerShell
- Rake
- Simple Build Tool (Scala)
- SMB Upload
- SSH Exec
- SSH Upload
- Visual Studio (sln)
- Visual Studio 2003
- Visual Studio Tests
- Xcode Project
- Xray: Cucumber Features Export Task
- Xray: Cucumber Features Import Task**

After that, configure it.

In this example, we configured the task to import to the Project **TEAM** of the Xray instance all the .features and .zip files that are contained in /Cucumber directory and sub directories, which were modified in the last 3 hours.

New Build Step

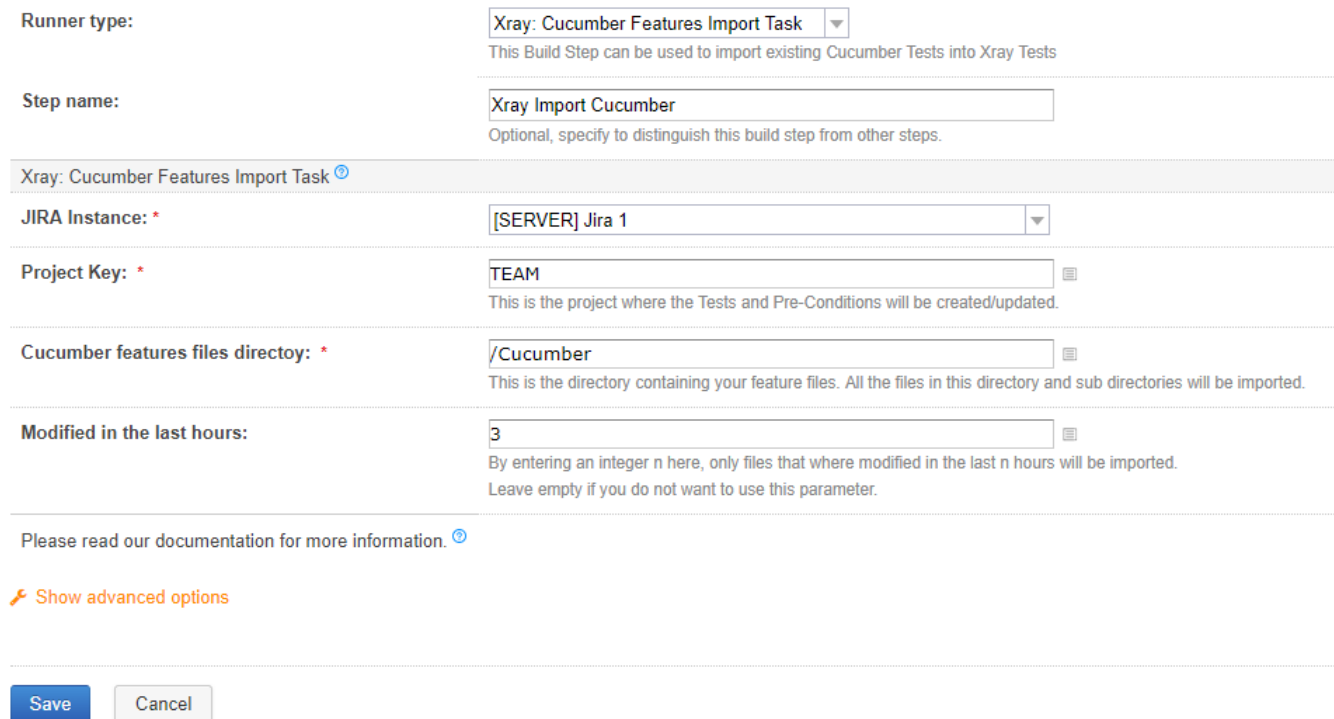

Runner type: **Xray: Cucumber Features Import Task**
This Build Step can be used to import existing Cucumber Tests into Xray Tests

Step name: **Xray Import Cucumber**
Optional, specify to distinguish this build step from other steps.

Xray: Cucumber Features Import Task ⓘ

JIRA Instance: * **[SERVER] Jira 1**

Project Key: * **TEAM**
This is the project where the Tests and Pre-Conditions will be created/updated.

Cucumber features files directory: * **/Cucumber**
This is the directory containing your feature files. All the files in this directory and sub directories will be imported.

Modified in the last hours: **3**
By entering an integer n here, only files that were modified in the last n hours will be imported.
Leave empty if you do not want to use this parameter.

Please read our documentation for more information. ⓘ

 **Show advanced options**

Save **Cancel**

Importing the execution results

To start the configuration, add a build step *Xray: Results Import Task*.

-- Choose build runner type --

NuGet Pack
NuGet Publish
NUnit
PowerShell
Rake
Simple Build Tool (Scala)
SMB Upload
SSH Exec
SSH Upload
Visual Studio (sln)
Visual Studio 2003
Visual Studio Tests
Xcode Project
Xray: Cucumber Features Export Task
Xray: Cucumber Features Import Task
Xray: Results Import Task

After that, you may configure it.

In this example, we configured the task to import the **Cucumber JSON** results back to Jira.

New Build Step

Runner type:

Xray: Results Import Task

This plugin allows the usage of Xray Export and Import tasks

Step name:

Xray Cucumber JSON

Optional, specify to distinguish this build step from other steps.

Execute step: ⓘ

If all previous steps finished successfully

Specify the step execution policy.

Xray: Results Import Task ⓘ

JIRA Instance: *

[SERVER] Jira 1

Format: *

Cucumber JSON

Execution Report File (file path with file name): *

report.json

Please read our documentation for more information. ⓘ

⚙ Hide advanced options

Save

Cancel

Once all configurations are done, click Save at the bottom of the page.

After running the job, the expected result is a new Test Execution issue created in the Jira instance.

Project: All ▾

Type: All ▾

Status: All ▾

Assignee: All ▾

Contains text

More ▾

Q

Advanced

⋮ ▾

Created Date: Within the last... ▾ ×

1-1 of 1 🗉

Columns ▾

T	Key	Summary	Tests association with a Test Execution	Status	Created ▾	Updated	
▶	PROJ-177	Execution results [1489077439985]	PROJ-79 PROJ-78	OPEN	09/Mar/17	09/Mar/17	...

1-1 of 1 🗉

Importing the execution results with user-defined field values

For Cucumber, Behave, JUnit, Nunit and Robot, Xray for Jenkins allows you to create new Test Executions and have control over newly-created Test Execution fields. You can send two files, the normal execution result file and a JSON file similar to the one Jira uses to create new issues. More details regarding how Jira creates new issues [here](#).

For this scenario and example, the import task needs to be configured with the **Cucumber JSON Multipart** format. When selecting this option, you can additionally configure the *Test Execution fields* in one of two ways:

- Insert the relative **path** to the JSON file containing the information;
- Or, insert the **JSON content** directly in the field.

In this example, we configured the following object:

```
{
  "fields": {
    "project": {
      "key": "PROJ"
    },
    "summary": "Test Execution for Cucumber results",
    "issuetype": {
      "id": "10102"
    }
  }
}
```

And configured the task to import the **Cucumber JSON Multipart** results back to Jira.

New Build Step

Runner type: Xray: Results Import Task
This plugin allows the usage of Xray Export and Import tasks

Step name: Xray Cucumber JSON
Optional, specify to distinguish this build step from other steps.

Execute step: If all previous steps finished successfully
Specify the step execution policy.

Xray: Results Import Task

JIRA Instance: * [SERVER] Jira 1

Format: * Cucumber JSON multipart

Execution Report File (file path with file name): * report.json

Test Execution fields: * JSON Content

```
{
  "fields": {
    "project": {
      "key": "PROJ"
    },
    "summary": "Test Execution for Cucumber results",
    "issuetype": {
      "id": "10102"
    }
  }
}
```

Please read our documentation for more information.

[Hide advanced options](#)

Save Cancel

Once all configurations are done, click Save.

After running the job, the expected result is a new Test Execution issue created in the Jira instance, with the Test Execution fields as specified in the build step configuration.

JUnit

Apart from supporting Cucumber natively, Xray enables you to take advantage of many other testing frameworks like JUnit. In this sense, Xray for Jenkins lets you import results in other formats besides Cucumber JSON.

If you want to import **JUnit XML reports**, a typical Job outline would be:

1. Pulling the JUnit project
2. Executing the tests in the CI environment
3. **Importing the execution results, including Tests, to JIRA**

Importing the execution results

To start the configuration, add the build step *Xray: Results Import Task*.

-- Choose build runner type --

- NuGet Pack
- NuGet Publish
- NUnit
- PowerShell
- Rake
- Simple Build Tool (Scala)
- SMB Upload
- SSH Exec
- SSH Upload
- Visual Studio (sln)
- Visual Studio 2003
- Visual Studio Tests
- Xcode Project
- Xray: Cucumber Features Export Task
- Xray: Cucumber Features Import Task
- Xray: Results Import Task**

After that, configure it.

In this example, we have a configuration where the **JUnit XML** format is chosen.

After running the plan, the expected result is a new Test Execution issue created in the JIRA instance.

Make sure to select "Always, even if build stop command was issued" so, even some previous step fail, the tests will still be imported.

New Build Step

Runner type: Xray: Results Import Task
This plugin allows the usage of Xray Export and Import tasks

Step name: JUnit XML
Optional, specify to distinguish this build step from other steps.

Execute step: Always, even if build stop command was issued
Specify the step execution policy.

Xray: Results Import Task

JIRA Instance: * [SERVER] Jira 1

Format: * JUnit XML

Import to Same Test Execution: ☒
When this option is check, if you are importing multiple execution report files using a glob expression, the results will be imported to the same Test Execution

Execution Report File (file path with file name): * JUnit/TestResult.xml

Project Key: PROJ

Test Execution Key:

Test Plan Key:

Test Environments: Android;IOS;Cordova

Revision:

Fix Version:

Please read our documentation for more information.

[Hide advanced options](#)

Save Cancel

Project: All

Type: All

Status: All

Assignee: All

Contains text

More

Q

Advanced

Created Date: Within the last...

1-1 of 1

T	Key	Summary	Tests association with a Test Execution	Status	Created	Updated	Test Environments		
	PROJ-185	Execution results - TestResult.xml - [1489165846959]	PROJ-121	OPEN	10/Mar/17	10/Mar/17	Android	Cordova	iOS

1-1 of 1

You can also import multiple results using a glob expression, like in the following example

New Build Step

Runner type:

Xray: Results Import Task

This plugin allows the usage of Xray Export and Import tasks

Step name:

JUnit XML

Optional, specify to distinguish this build step from other steps.

Execute step:

Always, even if build stop command was issued

Specify the step execution policy.

Xray: Results Import Task

JIRA Instance:

[SERVER] Jira 1

Format:

JUnit XML

Import to Same Test Execution:

☒

When this option is check, if you are importing multiple execution report files using a glob expression, the results will be imported to the same Test Execution

Execution Report File (file path with file name):

/myreports/**/*.xml

Project Key:

PROJ

Test Execution Key:

Test Plan Key:

Test Environments:

Revision:

Fix Version:

Please read our documentation for more information.

Hide advanced options

Save

Cancel

Troubleshooting

The build process is failing with status code 403

When you check the log, it has the following:

#120 (21 Aug 18 17:12)

Overview

Changes

Build Log

Parameters

Artifacts

Result:

Cannot start build runner

Time:

21 Aug 18 17:12:54 - 17:13:00 (6s)

Investigation:

Assign...

Agent:

Pedro-PC-2

Triggered by:

you on 21 Aug 18 17:12

Build problems: 1

java.util.concurrent.ExecutionException: com.xpandit.xray.exception.XrayClientCoreGenericException: Unable to confirm Result of the upload..... Upload Failed! Status:403 Response:<html><head> <title>Forbidden (403)</title>

By default, when you successively try to log into Jira with the wrong credentials, the Jira instance will prompt you to provide a CAPTCHA the next time you try to log in. It is not possible to provide this information via the build process, so it will fail with status code **403 Forbidden**.

You will need to log into Jira via the browser and provide the CAPTCHA.

JIRA Dashboards DbConsole Search Log In

Welcome to JIRA

Sorry, your username and password are incorrect - please try again.

Username

Password

☐ Remember my login on this computer



Not a member? To request an account, please contact your JIRA administrators.

[Can't access your account?](#)

If you are a Jira administrator, you can go to Jira administration > User Management and reset the failed login.

CI_User	CI_User user@example.com	Count: 9 Last: Today 1:55 PM	jira-software-users	JIRA Software	JIRA Internal Directory	Edit ...
CAPTCHA required at next login Last failed login: Today 1:57 PM Current failed logins: 7 Total failed logins: 21 Reset failed login count						

Invalid JIRA instance

When you check the log, it has the following:

#136 (22 Aug 18 14:31)

Overview Changes Build Log Parameters Artifacts

Tree view | Tail

View: All messages Console view

```
[14:31:46] The build is removed from the queue to be prepared for the start
[14:31:46] ▶ Collecting changes in 1 VCS root (1s)
[14:31:47] Starting the build on the agent Ubuntu
[14:31:48] Clearing temporary directory: /home/xpand/temp/buildTmp
[14:31:48] ▶ Publishing internal artifacts (1s)
[14:31:48] Using vcs information from agent file: 3bb8bf075bfdca57.xml
[14:31:48] Checkout directory: /home/xpand/work/3bb8bf075bfdca57
[14:31:48] ▶ Updating sources: auto checkout (on agent)
[14:31:49] ▼ Step 1/1: Xray: Results Import Task
[14:31:49] [Step 1/1] Selected Format: JUnit XML
[14:31:49] [Step 1/1] Not found/Invalid Jira instance.
[14:31:50] [Step 1/1] Step Xray: Results Import Task failed
[14:31:50] ▶ Publishing internal artifacts
[14:31:49] Unknown build problem reported on agent
[14:31:51] Build finished
```

This occurs when a JIRA instance is selected in the build step configuration and that instance is later deleted in the Xray global settings.

This error is shown in the build step.

Build Steps

In this section you can configure the sequence of build steps to be executed. Each build step is represented by a build runner and provides integration with a specific build or test tool. ⓘ

+ Add build step

✎ Auto-detect build steps

Build Step	Parameters Description
1. Xray: Results Import Task	<u>An invalid Jira instance is defined.</u> Format: JUnit XML Execute: Always, even if build stop command was issued

To solve this, edit the build step, select a valid JIRA Instance and save.