

[Xray Server] Overall Execution Status with wrong results

Problem

Sometimes the Overall Execution Status of a Test Plan shows the status TODO even though it has executions linked with different status (PASS/FAIL)


Possible Causes

One of the causes is that TestRunStatus is not in the context of issuetype neither in the project. Another cause is when field TestRunStatus is hidden in the field configuration

Solution

1. *TestRunStatus is not in the context of the issuetype neither project*


TestRunStatus must be defined with the issuetype and the selected project our global. For that you need to go to **Fields - Custom Fields - TestRunStatus** and press on the **Action** and select **Configure**:

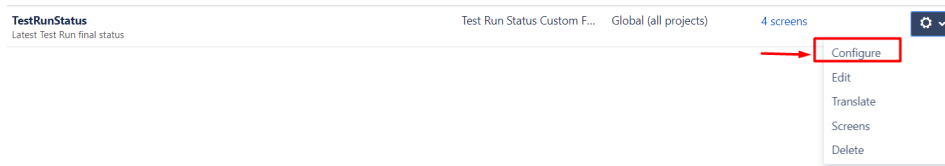

After that, press on **edit configuration**, inside there apply to the issuetype **Test** and apply to **Global Context**:



Choose applicable issue types

Please select the applicable issue types. This will enable the custom field for these issues types in the context specified below.

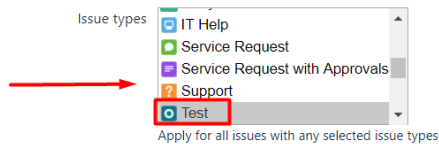

Choose applicable context

Please choose the contexts where this configuration will be applicable. Note that this will apply to only issues with the selected issue type as above.

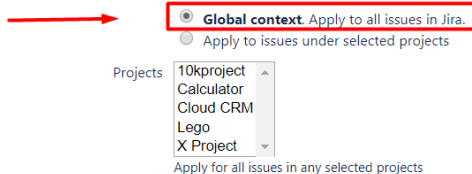

2. *TestRunStatus hidden*

TestRunStatus is hidden on the configuration field, need to go **Issues - field configuration - TestRunStatus** and press **Show** :



Related articles

- [Security Bulletin Update - Log4J \(CVE-2021-4104\)](#)
- [\[Xray DC\] Lost of Pre-condition links on Xray 7.x](#)
- [\[Xray Server/DC\] Incompatibility with Jira 9.11 and above](#)
- [\[Xporter Server\] Incompatibility with Jira 9.11 and above](#)
- [\[Xray\] Can I downgrade from Xray 7.x?](#)