

Integration with Boozang


- [Overview](#)
- [Main features](#)
 - [Mapping of concepts](#)
- [Flow](#)
- [Setup](#)
- [Import Xray Cucumber Tests into Boozang](#)
- [Automating Cucumber Tests in Boozang](#)
- [Import results to Xray](#)
 - [Jenkins](#)
 - [Command line](#)
 - [Authenticate](#)
 - [Send results to Xray](#)
- [Learn more](#)

Overview

[Boozang](#) is a codeless testing tool that allows you to define and execute UI/API automated tests without the need to code them. It also supports Cucumber tests and has a modular approach towards testing.

Integration with CI/CD tools is also possible through scripts generated in Boozang to be used in your CI/CD tool.

More details about Boozang [here](#).

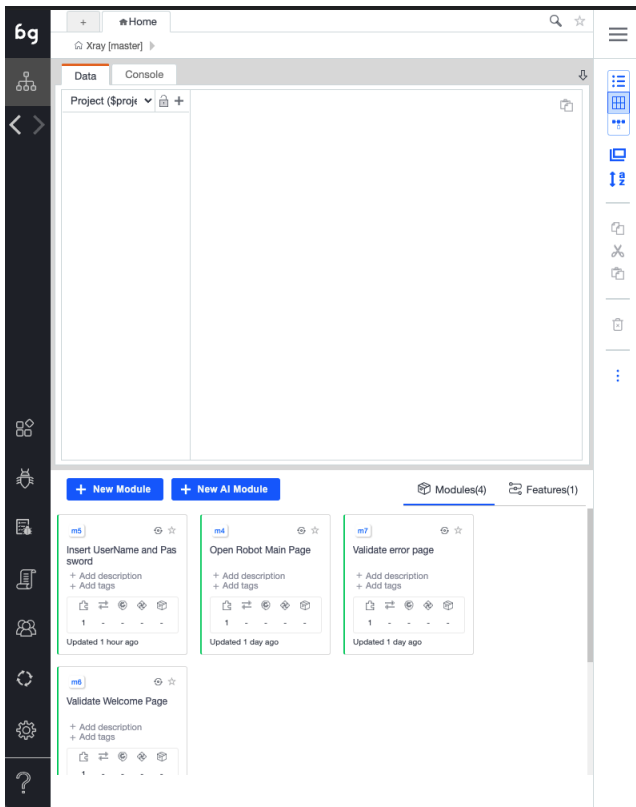

Home

Account

Xray

(Branch: master-auto-20210923, Project Application Language: English)

Launch Tool

Installation

Team

Details


Requirements

Bugs

Choose the installation option that suits your needs:

Run The Boozang tool in Chrome


Install the Chrome extension and get started testing any site within minutes. Use this option to get familiar with the tool.



Install Chrome extension

I have file system access


Install the HTML snippet to test my own site. Get the full benefits of the Boozang tool, such as cross-browser testing, linkable tests and **CI server** integration.



Download the Fragment

My teammate have file system access

Email the HTML snippet to a team member so they can install it for me.



Email the Fragment to Team member

Main features

This integration provides:

- Integration with Xray cloud or Server/DC
- Ability to export Cucumber tests from Xray to Boozang
- Automate the tests in Boozang
- Import the automation results back to Xray


Mapping of concepts

Boozang	Xray
Test (Cucumber)	Test Case (Cucumber)
Test Execution	Test Execution

Flow

If you are using Xray as the [master of information](#) (i.e. defining your Cucumber tests and writing those in [Gherkin](#) with Xray), then you will import that specification into Boozang to automate the steps and execute them.

Once the execution is done you will import the test results back to Xray; so the flow will be the below one:

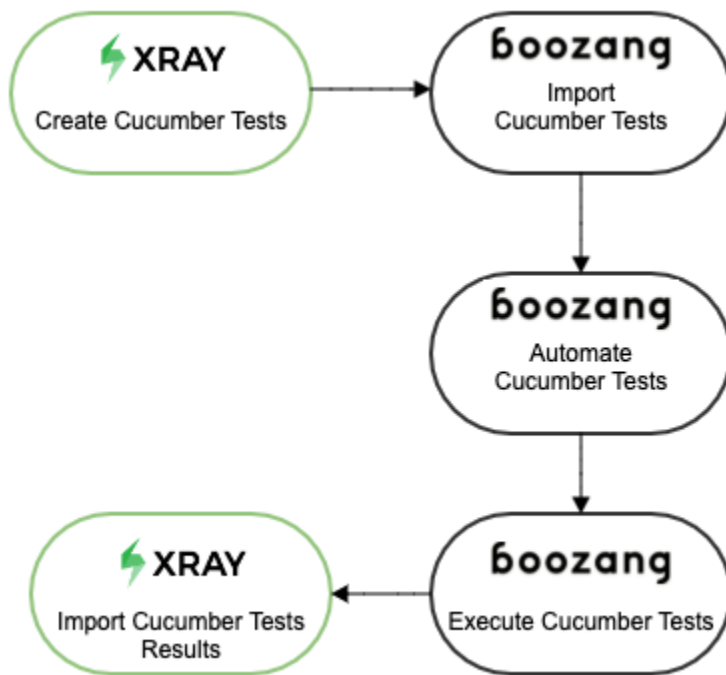

Setup

Start by having your Cucumber Tests defined in Xray. If you do not have those defined yet, you can follow this [article](#) in order to add your Cucumber tests.

The second step is to define a JQL query, in Jira/Xray, to select those tests in order to be imported into Boozang - the integration is based on this filter. To do so select "Search for issues" from the "Filters" entry in the top menu

Current search

Search for issues

*Test Type

Archived issues

Search Basic

Columns

T	Key	P	Status	Resolution	Created	Due	Development	TestRunStatus	Test Type	TestEstimation	Original Estimate	TestExecEstimation
XT-47	Valid Login	O	TO DO	Unresolved	16/Jun/21			PASS	Cucumber			

Introduce the query that will allow you to select the Cucumber Tests that you want to export to Boozang (in order to automate those), in our case it will look like this:

Search Save as

*Test Type' in (Cucumber) and key = XT-47'

Search Basic

Columns

T	Key	Summary	P	Status	Resolution	Created	Due	Development	TestRunStatus	Test Type	TestEstimation	Original Estimate	TestExecEstimation
XT-47	Valid Login		O	TO DO	Unresolved	16/Jun/21			PASS	Cucumber			

Once you have the filter defined save it using the "Save as" option.

Provide a name and save the id that Jira will associate to your filter. This is especially important as we will use this id in the integration with Boozang to import the Cucumber Tests.

The screenshot shows the Jira interface. In the top navigation bar, the 'Save as' button is highlighted with a red box. Below it, a search filter is defined: "Test Type" in (Cucumber) and key = XT-47. The filter is saved with the name "Boozang". The resulting table shows one issue: XT-47, Valid Login, with status TO DO, resolution Unresolved, created on 16/Jun/21, and test type Cucumber. The browser address bar shows the URL: xray-demo3.xpand-it.com/issues/?filter=12600.

T	Key	Summary	P	Status	Resolution	Created	Due	Development	TestRunStatus	Test Type	TestEstimation	Original Estimate	TestExecEstimation
1	XT-47	Valid Login	○	TO DO	Unresolved	16/Jun/21			PASS	Cucumber			

At this stage we have defined the Cucumber Tests in Xray and created a filter to extract those fields, so it is now time to switch to the Boozang application.


Access [Boozang](#) via your region and create a new project designated for your test automation. In the example below, an Xray project was created. Next, open the Boozang tool by selecting the "Launch Tool" option:

[Home](#)


[Account](#) ▼

The screenshot shows the Boozang application dashboard. It welcomes the user, Cristiano Cunha, and provides a green button to "Create new Project". Below this, it states "This is Region Europe. Select a project below to view installation instructions, manage your project team, view bugs or add project versions." There are two buttons: "Xray" and "Launch Tool", both highlighted with red boxes.

This will open the tool unless it's the first time you press this option. If so, it will take you to the installation option of the Boozang AI Chrome extension and after you've installed it you'll be taken to the tool.

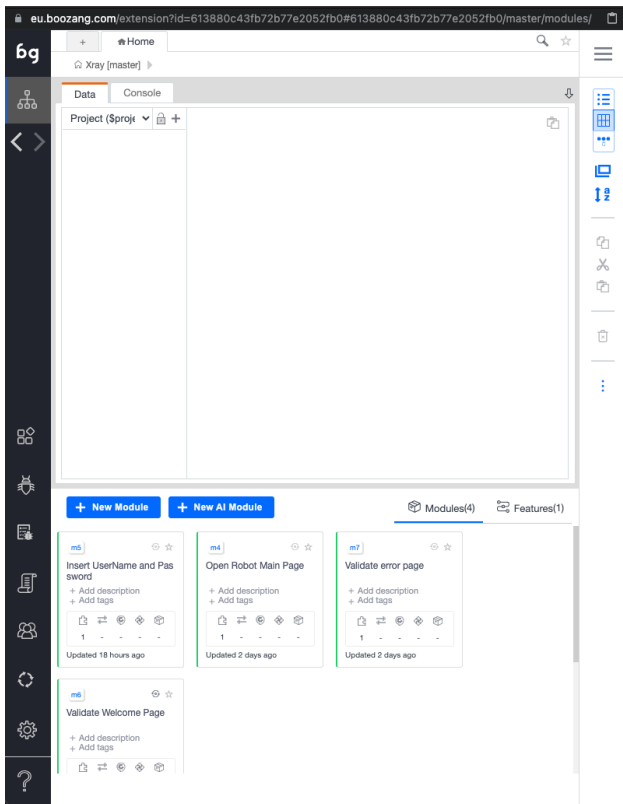

In order to configure the integration with Xray, we must access the main page and select the configuration option in the bottom left-hand corner and then configure the *Feature File Server* by clicking on the configuration icon next to it

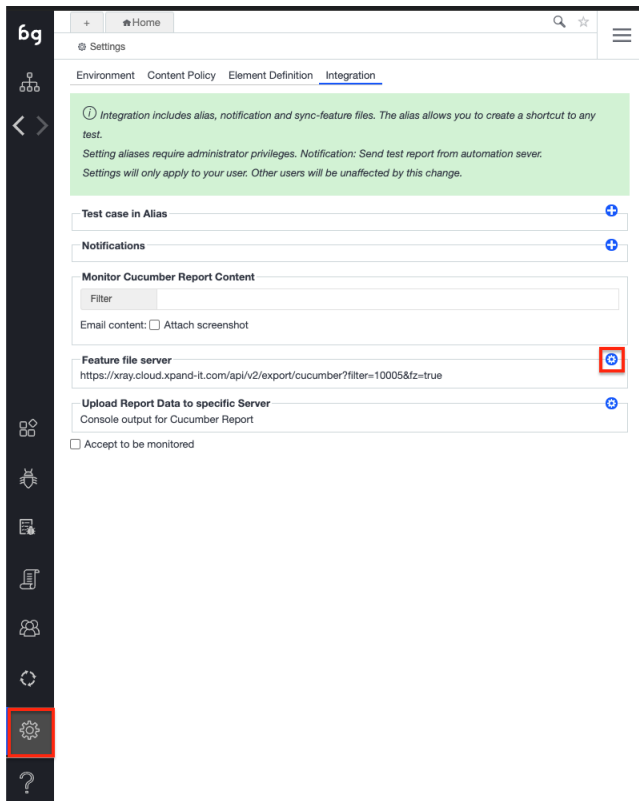

This will open a configuration pop up with the different integrations available in Boozang, in our case we are going to choose the "Jira/Xray" option

LOAD FEATURES FROM VCS

Type	Jira / Xray	▼
File List Url	https://xray-demo3.xpand-it.com/rest/raven/1.0/export/test?filter=12600&fz=true	⋮
Token	asd:asd	
Client ID		
Client Secret		🔒
Match File	*.feature	

☒ In Zip

Done

Check


Cancel

In more detail:

- Type: Choose Jira/Xray option
- File List Url: Replace by your Jira instance URL plus "/rest/raven/1.0/export/test?filter" and the JQL filter that we have saved in Jira/Xray
- Token: Insert the username and password for your Jira instance
- Client ID: Leave blank
- Client Secret: Leave blank
- Match File: Leave the "*.feature"


You can select Check to validate that the configuration is OK, and once everything is done click on Done.

Now get back to the main page of Boozang application by selecting the first option in the left-hand side menu.

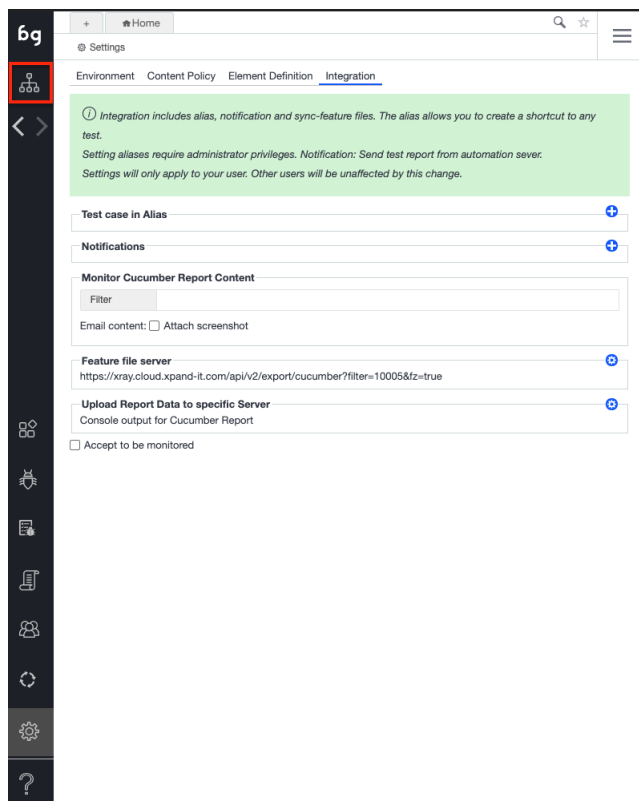

Import Xray Cucumber Tests into Boozang

Now that the configuration is set, we can export the Cucumber tests from Xray and import them into Boozang. To do so, select the option in the right-hand side menu as shown in the screenshot below, and choose "Import Features" option in the pop up that comes up.

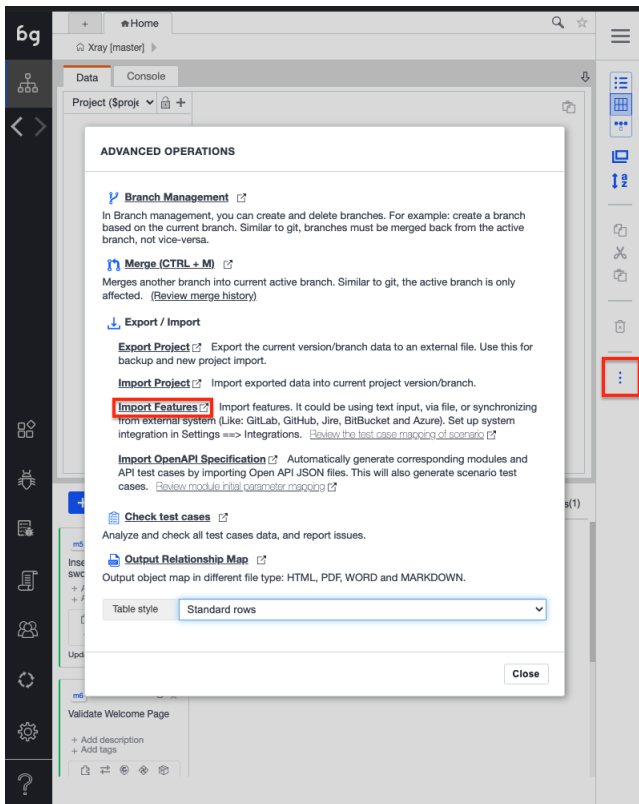

Another pop up will appear asking you to choose the import type, in our case, we will choose "Sync from server" and select Load.

CONFIRM

☐ By Text

☐ By File

☒ Sync from server

Load

Cancel

At this stage Boozang will connect to Xray and list all the requirements that are covered by the Cucumber tests present in the filter you have provided. In this case, two Cucumber Tests are covering the XT-45 User Story.

Xray

Tutorials

XT-47

Valid Login

Edit

Comment

Assign

More

To Do

In Progress

Done

Admin

1 of 1

Return to search

Doc. Generator

Export

Test Details

Type: Cucumber

Scenario Type: Scenario

Scenario: Given browser is opened to login page
When user "demo" logs in with password "mode"
Then welcome page should be open

Edit Steps

Pre-Conditions

Test Sets

Test Plans

Test Runs

Attachments

Issue Links

tests

XT-45 As a user, I can login the application

Assignee: Unassigned

Reporter: Xpand IT Admin

Votes: 0

Watchers: Stop watching this issue

Dates


Created: 16/Jun/21 2:17 PM

Updated: 17/Jun/21 10:00 AM

Agile


View on Board

The pop up it will show a preview of the requirement and where it will import the Tests from.

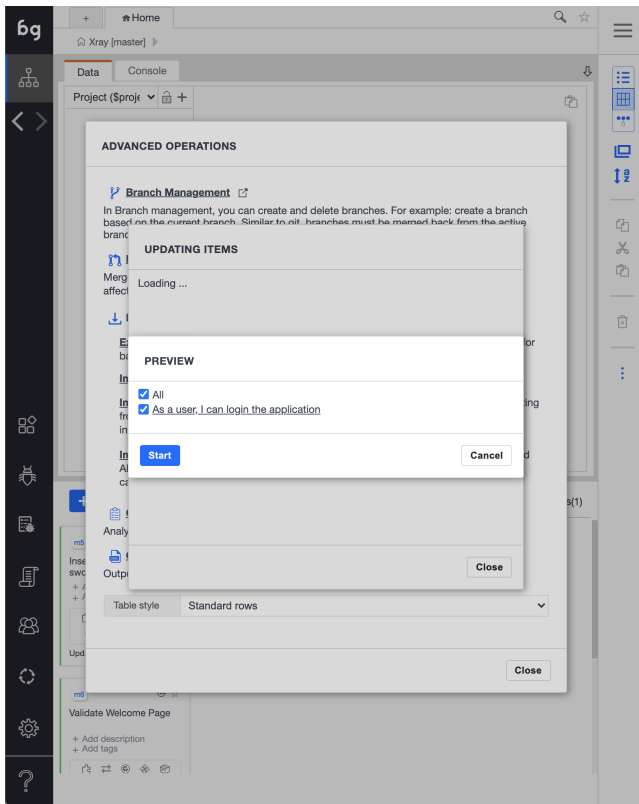


When selecting "Start", Boozang will show you the items it will create and proceed with the creation of the features.

Now that the features have been imported into Boozang, the next step would be to implement the code that will be executed to perform the actual validation. Head back to the main page and review the Features created.

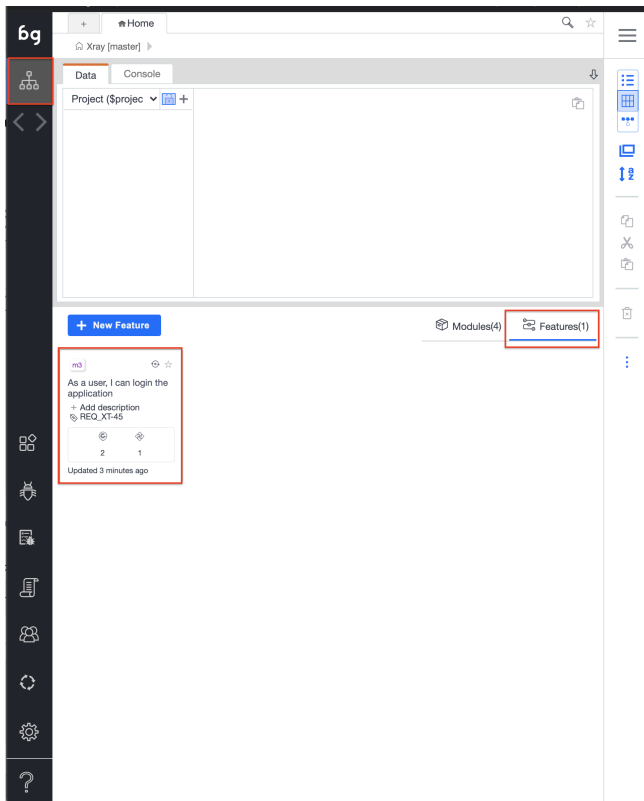

When clicking on *Feature*, the actual Tests that were imported will come up, and selecting either of them will show the detailed view of the Tests with the steps that need to be automated - displayed in red below.

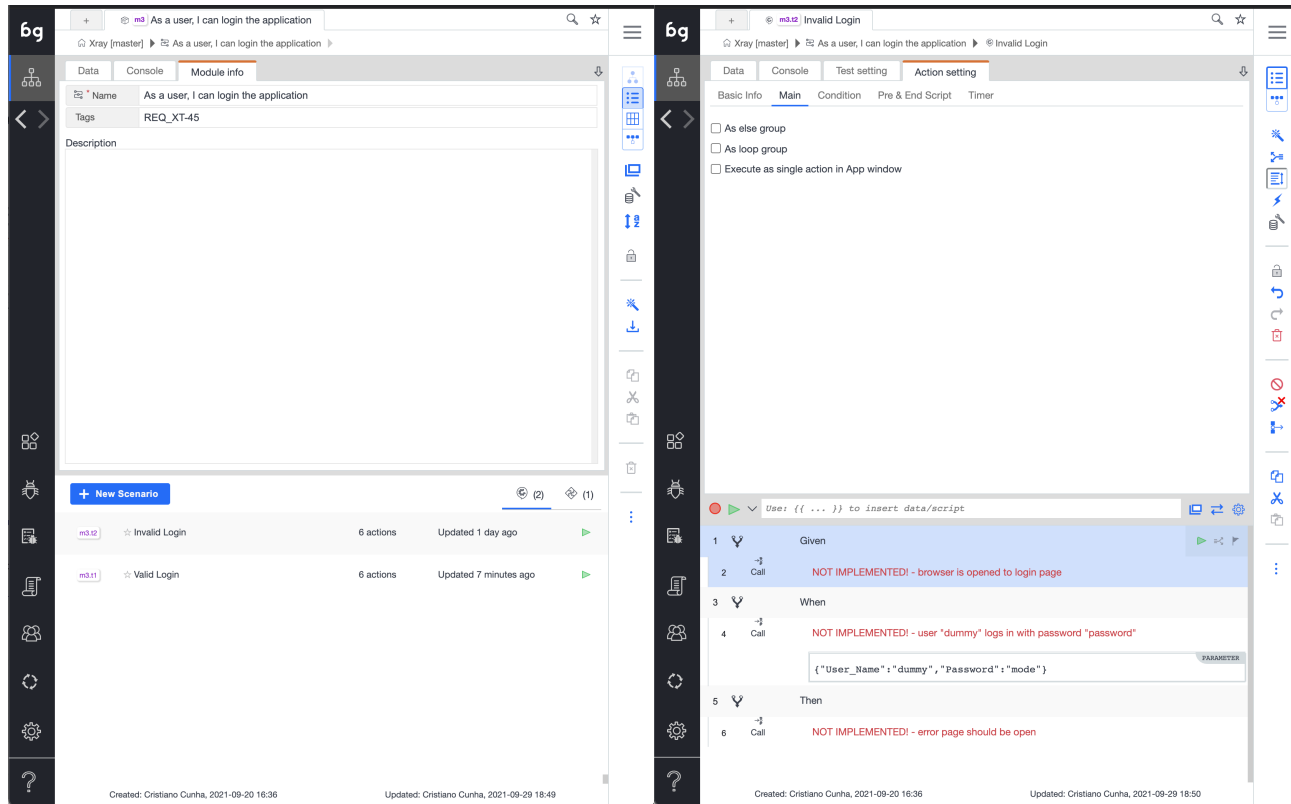

Automating Cucumber Tests in Boozang

There are several ways to automate tests and link them to steps in Boozang however for this section, we will focus on one. For other options more suited to your requirements, we suggest taking a look at Boozang's documentation.


For this example, what matters is to have the steps automated so that they can be executed and produce a report of the execution which will be imported into Xray.

The approach is to create new Modules with a test in them that will represent each step in the Cucumber scenario, that way Tests can be reused in other scenarios with the same description.

You can use the recording capability of Boozang to create each Test. The recorder allows you to define the Test steps and the validations required for each Test.


Tip

In order to reuse some Test steps, you must assure that when the Test starts it will not reload the URL but start where the last Test have ended. To do that, set the Parameter inside the "Reload Policy" of the detail of the Test to "Never".

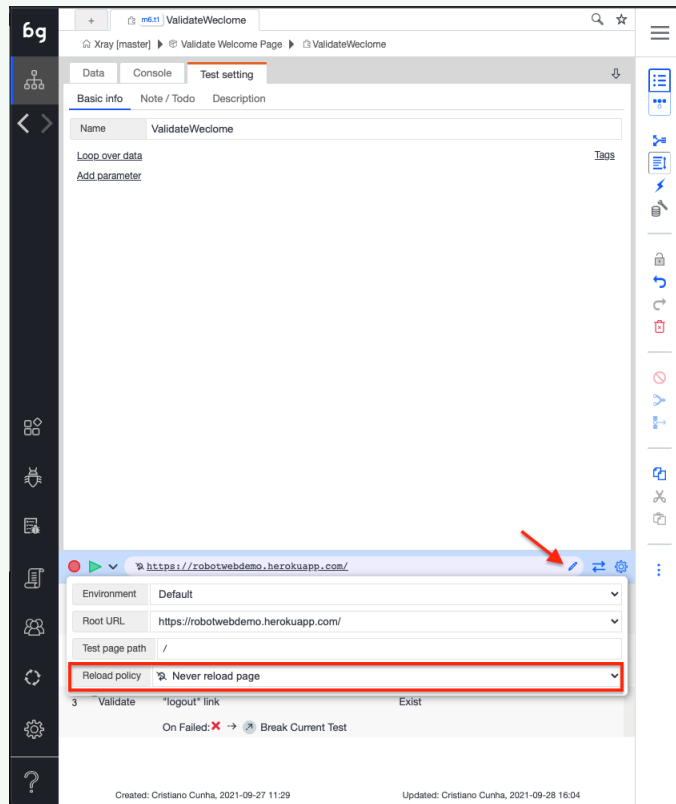


Once the Modules and Tests are ready, they'll need to be linked to each Step in the Cucumber Test. In order to achieve this, access the details of each Cucumber Test and click in the "NOT IMPLEMENTED! -..." which will load in the upper part of the application, under the *Main* submenu of the "Action Setting" tab.

Click on the "Goto Test" entry which Test will be associated to this step via a dropdown available with a list of tests to choose from:

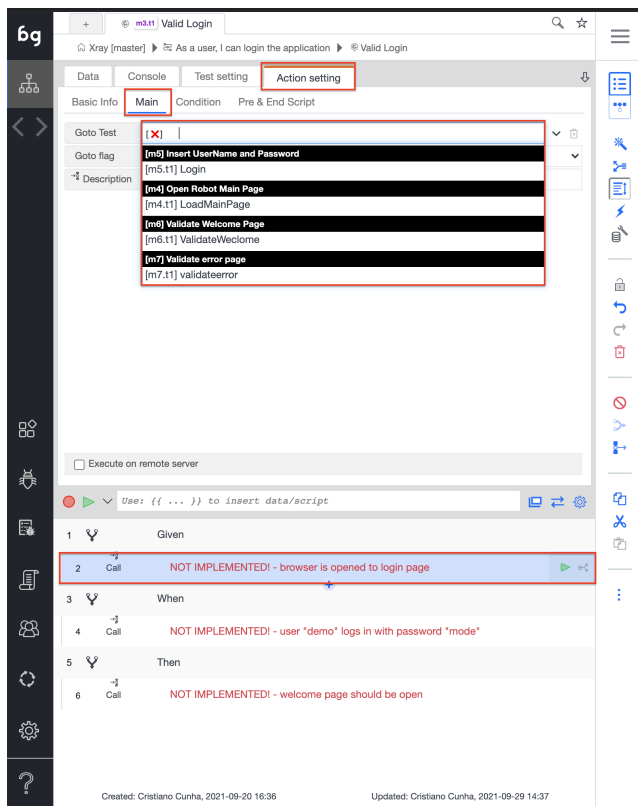

The final result looks like the following screenshot, where all the steps have automated Tests associated and are ready to be executed.

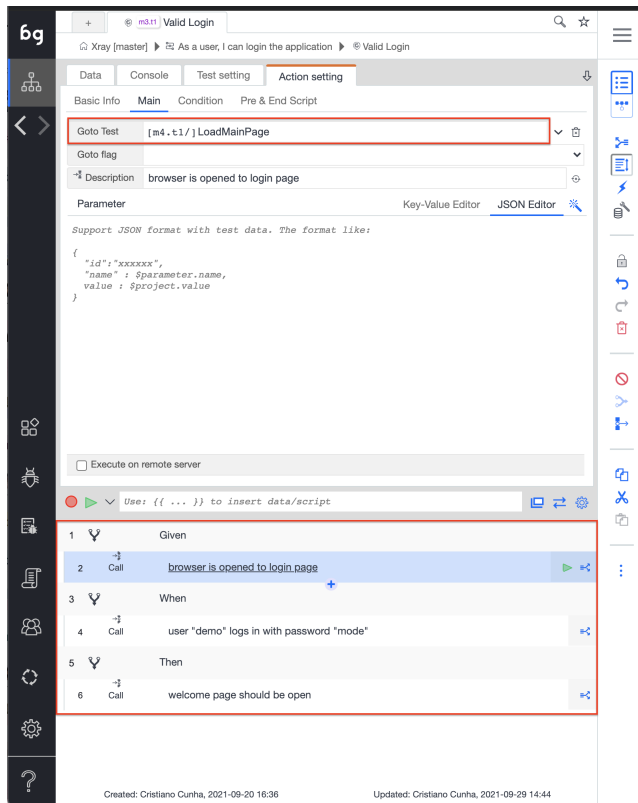

Once you have associated all steps, you can validate that everything is running as expected by clicking on the *Play* button. This option will execute the test and report the results back.

When executing the Tests, Boozang will open up a new browser window where you can follow the Test execution and report back to the Test window.

The image displays the Boozang test runner interface, which is used for executing and monitoring tests. The interface is divided into several sections:

- Test Runner (Top):** Shows the test name "Valid Login" and the test steps. The steps are listed in a table with a "Current Test" tab. The steps are:
 - 1. Given
 - 2. Call: browser is opened to login page
 - 3. When
 - 4. Call: user "demo" logs in with password "mode"
 - 5. Then
 - 6. Call: welcome page should be open
- JSON Editor (Right):** Displays the JSON data for the test. The JSON is:


```
{ 1: { 2: "User_Name": "demo", 3: "Password": "asdaad", 4: "Password1": "mode" } }
```
- Browser Window (Bottom):** Shows the "Welcome Page" with the message "Login succeeded. Now you can [logout](#)."

The interface also includes a sidebar with various icons for navigation and a bottom status bar showing the test execution progress.

Import results to Xray

Finally, the Tests which have been exported from Xray into Boozang are automated. The results from the executions have to be pushed back into Xray. This can be achieved via Boozang's CI where the ability to generate the necessary scripts for different CI/CD tools that will execute the Boozang Test Runner is available.


In Boozang, access the CI entry present in the bottom of the left menu.

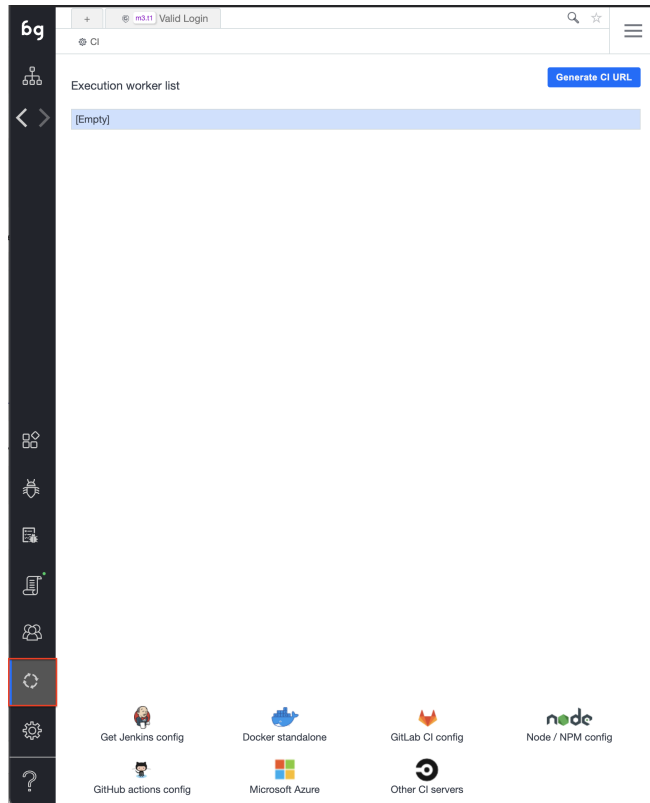


Jenkins

In this example, and to take advantage of the Xray Jenkins Plugin available, the script needed to include in Jenkins was generated by clicking the bottom link "*Get Jenkins config*".


A new pop up will appear requiring details to generate the script.

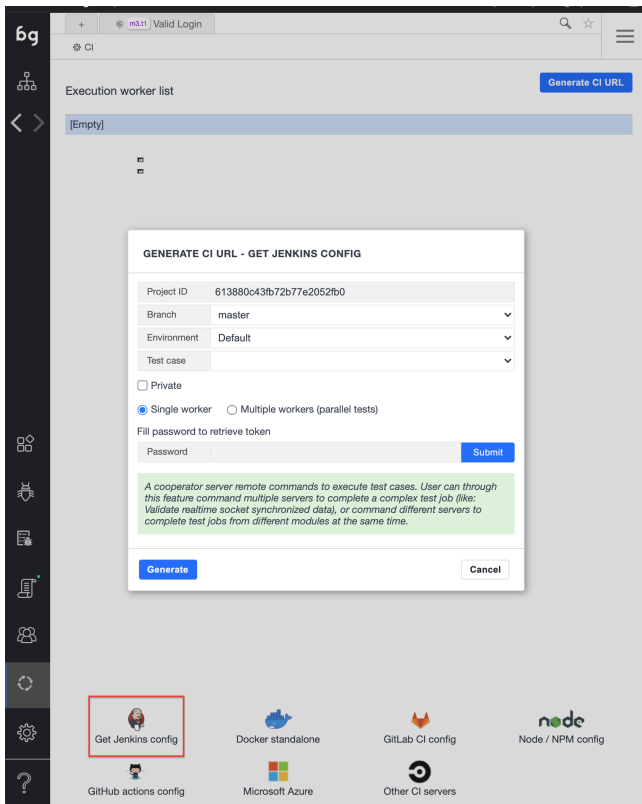


The majority of the options will be the default ones, let's choose the "Test case" to be the feature we have automated (from the drop down list).

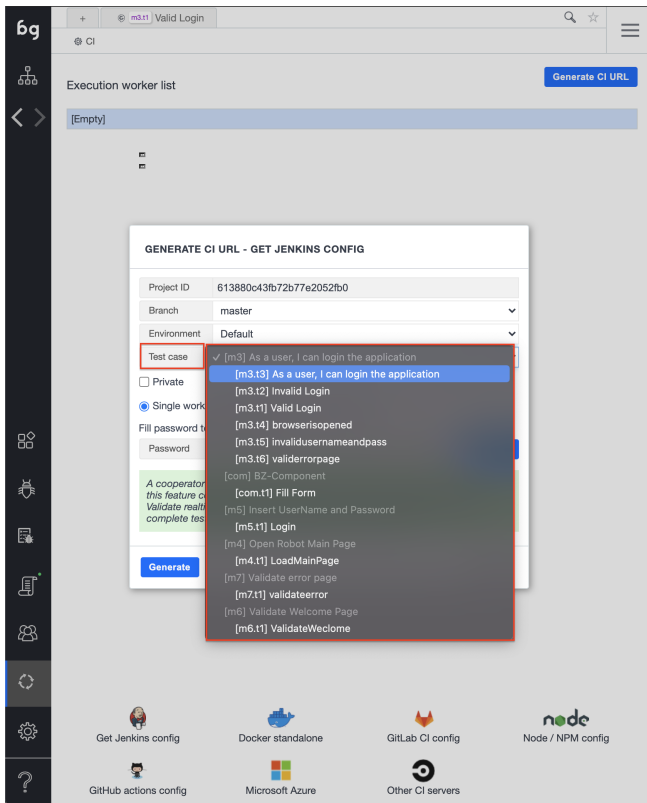

Fill in the password, click "Submit" and click on "Generate". This will produce the necessary script that we will be copied and pasted into Jenkins.

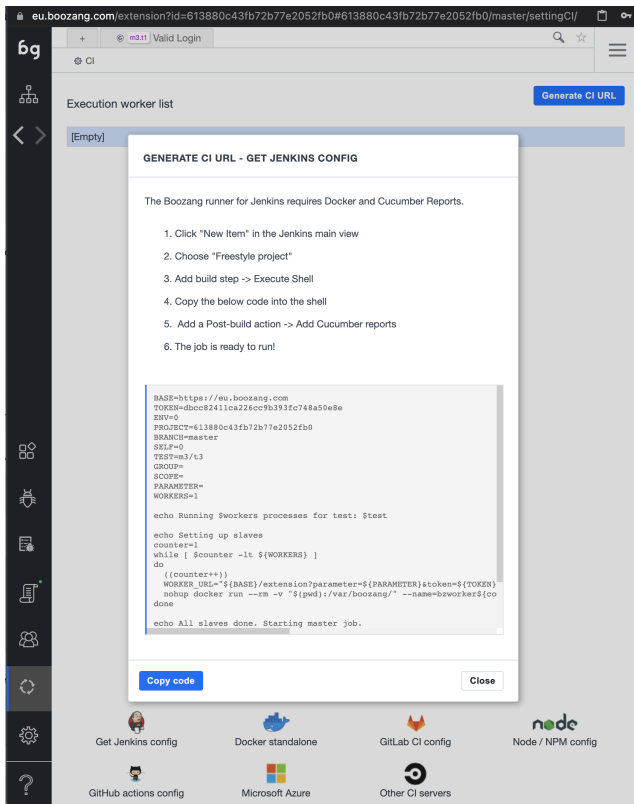

In Jenkins, we created a simple Project where an additional step was added to insert the script generated. More specifically by adding a "Execute shell" in the build step section and inserting the generated code there.

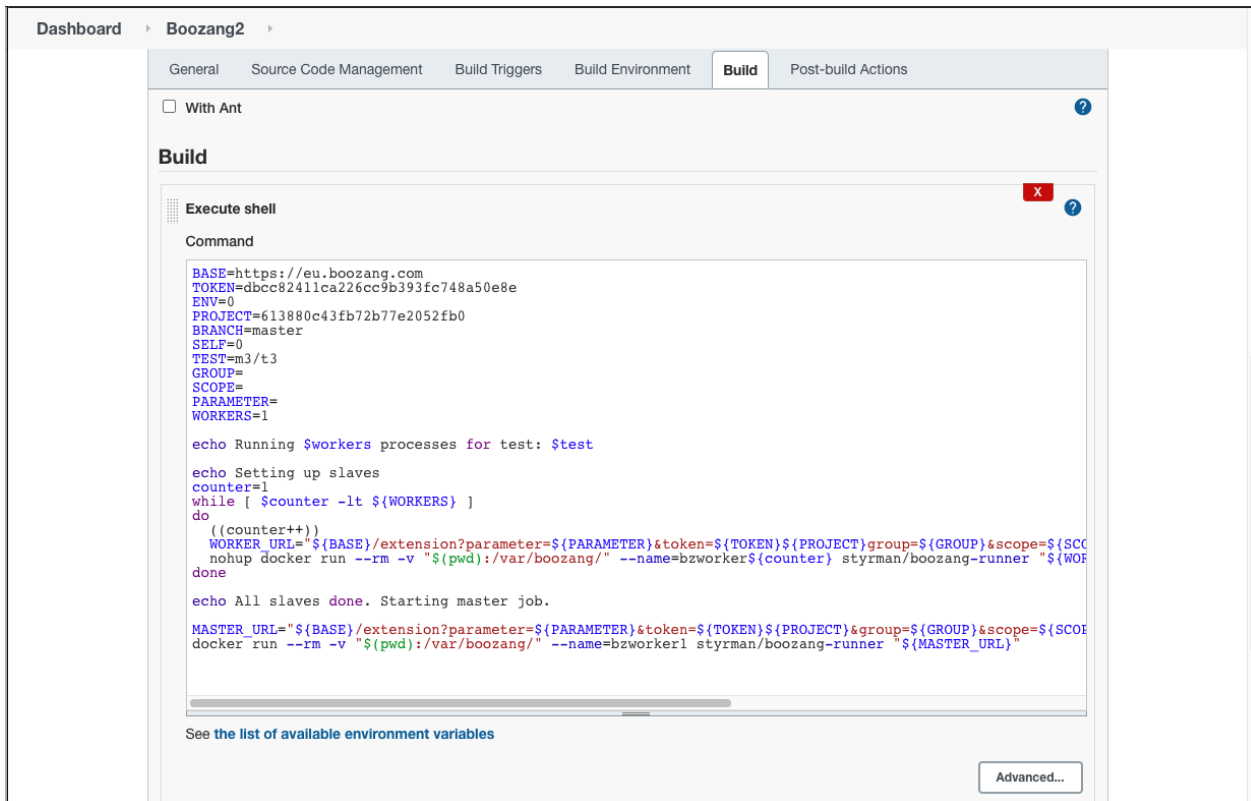

Tip

If you have defined several Tests the output of the execution will generate one report per Test. In order to upload the results, the results need to be merged into a single report. This can be achieved by using a tool that will merge two Cucumber reports into one.


You can find that tool [here](#), the usage is simple:

```
cucumber-json-merge-multiworker report_cucumber-m3-t1.json report_cucumber-m3-t2.json
```


After the execution, you can find the report in the default output file "*merged-test-results.json*" or specify the name of the output in the parameter "-o".

The last step, before executing the pipeline, is to add the Xray [Plugin](#) to import the results back to Xray. First, make sure you have previously installed the [plugin](#) and in your pipeline, just add in the Post Build Actions "*Xray: Results Import Task*" and configure properly with:

- the Jira/Xray instance that you will use to upload the results
- the Format of the results file you want to import, in our case Cucumber JSON
- The path and name of the file to be uploaded



Xray: Results Import Task



Jira Instance

Format

Parameters

Execution Report File (file path with file name)

☒ **Import in parallel**

Import all results files in parallel, using all available CPU cores.

[Click here for more details](#)

Once this pipeline is built, it will execute the tests in Boozang and import the results into Xray as you can verify in the "*Console Output*" of the build:


Dashboard > Boozang2 > #31


```
274: go to close, status: doing
275: BZ-LOG: report all tasks status,
276: post data from 552,1444
277: method: updateServerStatus, current tasks: 0
278: >>> /api/coop/ >>> without response
279: call all worker to close
280: post data from 1448
281: method: taskDone, current tasks: 0
282: >>> /api/coop/ >>> without response
283: task-done
284: One-Task Completed!
The test failed. Docker return code set to 1.
Build step 'Execute shell' marked build as failure
Archiving artifacts
[CucumberReport] Using Cucumber Reports version 5.6.0
[CucumberReport] JSON report directory is ""
[CucumberReport] Copied 0 properties files from workspace "/var/jenkins_home/workspace/Boozang2" to reports directory
"/var/jenkins_home/jobs/Boozang2/builds/31/cucumber-html-reports/.cache"
[CucumberReport] Copied 2 files from workspace "/var/jenkins_home/workspace/Boozang2" to reports directory
"/var/jenkins_home/jobs/Boozang2/builds/31/cucumber-html-reports/.cache"
[CucumberReport] Processing 2 json files:
[CucumberReport] /var/jenkins_home/jobs/Boozang2/builds/31/cucumber-html-reports/.cache/report_cucumber-m3-t1.json
[CucumberReport] /var/jenkins_home/jobs/Boozang2/builds/31/cucumber-html-reports/.cache/report_cucumber-m3-t2.json
[CucumberReport] Found 33.333333 failed steps, while expected not more than 0.000000 percent
[CucumberReport] Build status is left unchanged
Starting XRAY: Results Import Task...
#####
### Xray is importing the execution results ###
#####
File: /var/jenkins_home/workspace/Boozang2/report_cucumber-m3-t1.json
Starting to import results from report_cucumber-m3-t1.json
Response: (200) {"testExecIssue":{"id":"21831","key":"XT-315","self":"https://xray-demo3.xpand-it.com/rest/api/2/issue/21831"},"testIssues":{"success":
[{"id":"21257","key":"XT-47","self":"https://xray-demo3.xpand-it.com/rest/api/2/issue/21257"}]}, "infoMessages":["Could not make transition from workflow
status <b>To Do</b> to workflow status <b>Resolved</b>."]}
Successfully imported Cucumber JSON results from report_cucumber-m3-t1.json
XRAY_IS_REQUEST_SUCCESSFUL: true
XRAY_RAW_RESPONSE: {"testExecIssue":{"id":"21831","key":"XT-315","self":"https://xray-demo3.xpand-it.com/rest/api/2/issue/21831"},"testIssues":{"success":
[{"id":"21257","key":"XT-47","self":"https://xray-demo3.xpand-it.com/rest/api/2/issue/21257"}]}, "infoMessages":["Could not make transition from workflow
status <b>To Do</b> to workflow status <b>Resolved</b>."]}
XRAY_TESTS: XT-47
XRAY_ISSUES_MODIFIED: XT-315;XT-47
XRAY_TEST_EXECS: XT-315
Finished: FAILURE
```


REST API Jenkins 2.303.1


We can see the response from Xray where we can find the Test Execution created for this execution.

If you want to see the results in Jenkins, install the [Cucumber Reports Plugin](#) that will automatically process and generate a view in Jenkins for you to go over the results.


**Jenkins**


**1**


 cristiano cunha


 log out


Dashboard > Boozang2 > #26


 Back to Project


 Status


 Changes


 Console Output


 Edit Build Information

 Delete build '#26'


 Cucumber reports

 Open Blue Ocean

 Previous Build


 **Build #26 (Sep 28, 2021, 5:41:04 PM)**


[Keep this build forever](#)

 [add description](#)

Started 20 hr ago

Took **38 sec**

 No changes.

 Started by user [cristiano.cunha](#)

Cucumber Report

Jenkins

Previous results

Latest results

Features

Tags

Steps

Trends


Failures

Project	Number	Date
Boozang2	26	28 Sep 2021, 17:41

Features Statistics

The following graphs show passing and failing statistics for features

Scenarios



Feature	Steps						Scenarios			Features	
	Passed	Failed	Skipped	Pending	Undefined	Total	Passed	Failed	Total	Duration	Status
[m3] As a user, I can login the application	5	1	0	0	0	6	1	1	2	16.313	Failed
	5	1	0	0	0	6	1	1	2	16.313	1
	83.33%	16.67%	0.00%	0.00%	0.00%		50.00%	50.00%			0.00%

generate Cucumber HTML reports via: [Jenkins Plugin](#) | [Standalone](#) | [Sandwich](#) | [Maven](#)

If we verify the Test Execution that was created in Xray, the uploaded results with the total number of Tests and the Overall Execution Status is available - in this case, it's not relevant since there is one Test but if they were several Tests it will be the overall result of all the Tests.

Execution results [1632938223874]

Details
 Type: Test Execution
 Priority: Trivial
 Labels: None
 Test Plan: None
 Test Environments: None
 Status: TO DO (View Workflow)
 Resolution: Unresolved

Description
 Click to add description

Tests
 Add Tests

Overall Execution Status
 1 FAIL

Total Tests: 1
 Filter(s)

Rank	Key	Summary	Test Type	#Req	#Def	Assignee	Dataset	Status
1	XT-47	Valid Login	Cucumber	1	0	Xpand IT Admin		FAIL

Showing 1 to 1 of 1 entries

Attachments

Click on the Details button (below the red arrow) will give users a better understanding of the characteristics of the execution since it navigates to the execution panel of the Test Execution with the following information:

- The requirement that is covered by the Test, in this case, XT-45
- The scenario definition
- The details of the execution of each step

Valid Login

Test Issue Links
 XT-45 As a user, I can login the application

tests
 Test Type: Cucumber
 Scenario Type: Scenario
 Scenario:
 1 Given browser is opened to login page
 2 When user "demo" logs in with password "mode"
 3 Then welcome page should be open

Results

Context	Duration	Status
-	9 sec	FAIL

Steps

Step	Duration	Status
Given Browser is opened to login page	2510.000 ms	PASS
When User "demo" logs in with password "mode"	2238.000 ms	PASS
Then Welcome page should be open	4537.000 ms	FAIL

Element is not found or syntax error exists in the code
 ["B2.TW.document",

Command line

If Jenkins (or another CI/CD tool) is not part of your workflow you can use the Xray [API](#) to import the result back into Xray through the command line. To do so, please follow the next steps:

- Authenticate to obtain the token
- Send the results to Xray using the token

Authenticate

The authentication in the Server/DC version is done using the username and password in every request, so no special step to perform before executing the import request.

Send results to Xray

Finally to upload the results back into Xray you must use the following request:

```
curl -H "Content-Type: application/json" -X POST -u admin:admin --data @'xrayResults.json' 'https://xray-demo3.xpand-it.com/api/v2/import/execution'
```

When successful, the answer will have information of the Test Execution created.

We can see the detailed results in Xray:

The screenshot displays the Xray web interface. On the left is a sidebar with navigation links: XT board, Backlog, Active sprints, Releases, Reports, Issues, Components, Structure, Xray Reports, Xray Test Repository, Xray Test Plan Board, Automated Steps Library, Add-ons, PROJECT SHORTCUTS, Add a link to useful information for your whole team to see., Add link, and Project settings. The main content area is titled 'Valid Login' and shows 'Test Execution: XT-315 / Test: XT-47'. Below this, the 'Test Issue Links' section highlights 'XT-45 As a user, I can login the application'. The 'tests' section shows 'Test Type: Cucumber' and 'Scenario Type: Scenario'. The 'Scenario' section lists three steps: 1. Given browser is opened to login page, 2. When user "demo" logs in with password "mode", and 3. Then welcome page should be open. The 'Results' section shows a table with columns 'Context', 'Duration', and 'Status'. The table has one row for the scenario, with a duration of 9 sec and a status of 'FAIL'. Below this, the 'Steps' section shows a table with columns 'Steps', 'Duration', and 'Status'. The steps are: 'Given Browser is opened to login page' (2510.000 ms, PASS), 'When User "demo" logs in with password "mode"' (2238.000 ms, PASS), and 'Then Welcome page should be open' (4537.000 ms, FAIL). The 'Then' step is highlighted with a red box, and the error message 'Element is not found or syntax error exists in the code' is visible below it.

Context	Duration	Status
-	9 sec	FAIL

Steps	Duration	Status
Given Browser is opened to login page	2510.000 ms	PASS
When User "demo" logs in with password "mode"	2238.000 ms	PASS
Then Welcome page should be open	4537.000 ms	FAIL

Element is not found or syntax error exists in the code

```
[
  "B2.TW.document",
  ...
]
```

Learn more

- [Boozang home page](#)
- [Boozang features overview](#)
- [Boozang videos](#)

